


# Capacitive sensors

Non-contact detection of liquid and solid objects



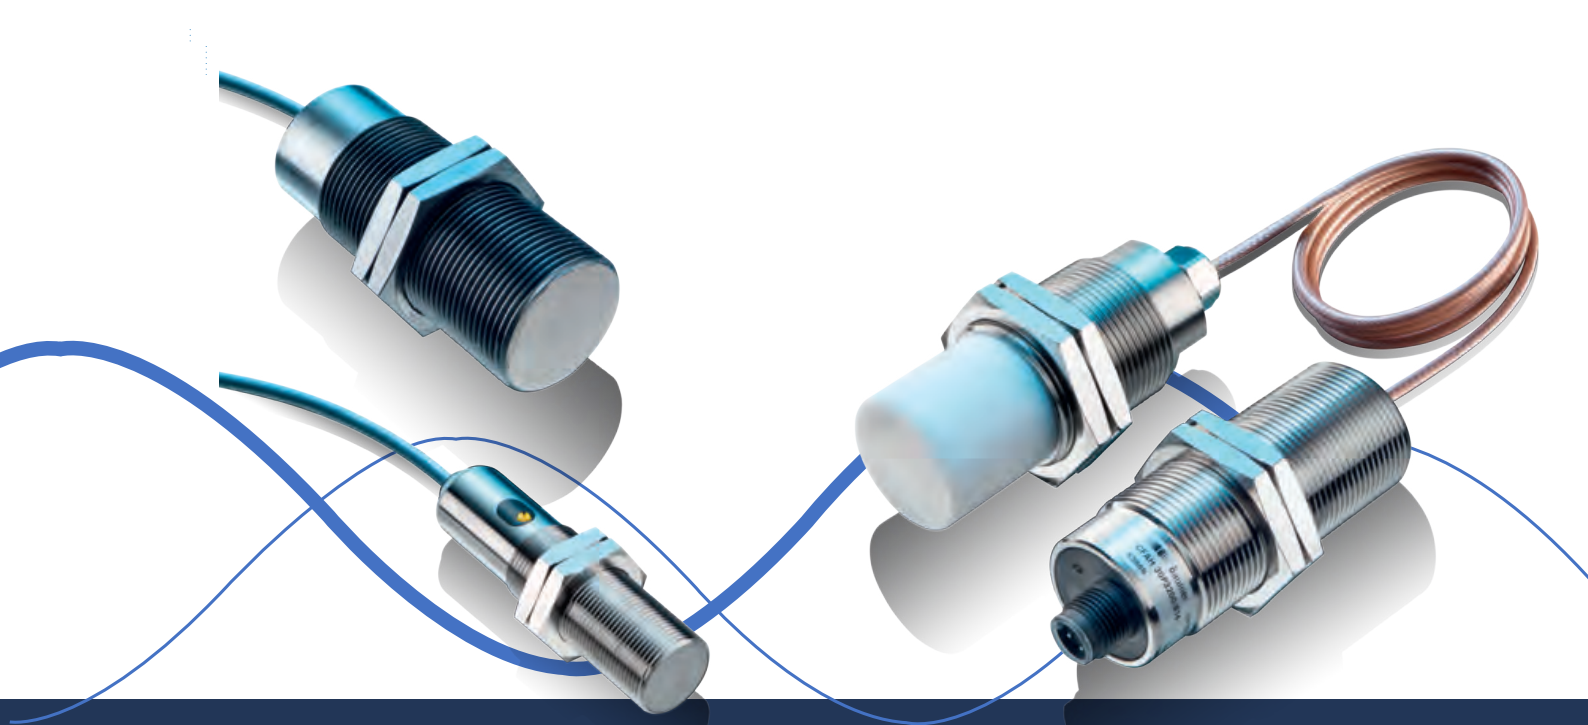

Baumer capacitive sensors are transducers that convert non-electrical quantities to electrical capacitance values.

They are used to measure fluid, pressure, humidity, mechanical stress, etc. Their operation principle is similar to open electric capacitor.

### **The main advantages of capacitive sensors:**

- Contactless
- They are available to work with any materials
- High durability level



To find out stock ability and delivery time to your region, please contact our manager.



[info@eltra-trade.com](mailto:info@eltra-trade.com)



# Table of contents.

---

## Introduction

Electrical and mechanical definitions	6
Definition of sensing distance	7
Protection classes	8
Installation and mounting procedure	9
Connection diagrams	10
Design and function	12
Detectable media	13
Sensor selection	14

---

## Capacitive sensors

Overview	18
Cylindrical designs	20
Rectangular designs	33

---

## Accessories

Connectors	42
Connectors/Pin assignment	46
Connectors/Housing types	47
Divers	48
Mounting kits Sensofix	50
Mounting accessories CFDK 25	52

---

## Index

Index Capacitive sensors	53
--------------------------	----

# Material-independent object and filling level detection – capacitive sensors.



## Contactless

- Reliable object detection with sensing distances up to 30 mm
- No sensor damage due to aggressive media
- Medium is not contaminated by the sensor



## No matter what material

- Reliable of detection of conductive and non-conductive materials
- Failure-free detection of highly transparent and opaque materials
- Reliable detection even on optically reflecting surface




## Durable

- Protected installation outside the container possible
- Closed sensor front increases lifetime in case of contact with liquids
- High wear resistance of the housing increases sensor lifetime in case of contact with granules


## Applications

- Machine tools
- Graphic machinery
- Packaging machinery
- Food and beverages
- Installation/handling
- Medical devices
- Laboratory automation

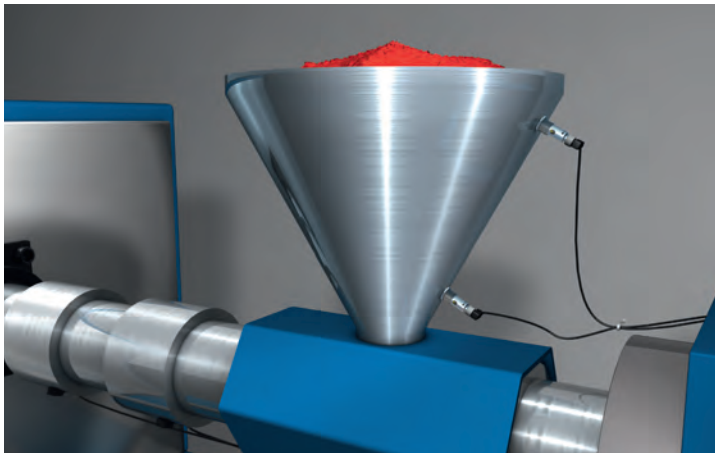


## Granule level detection in injection molding plants

- Robust design protects the sensors from mechanical wear
- Surface-independent detection
- Fast and easy installation

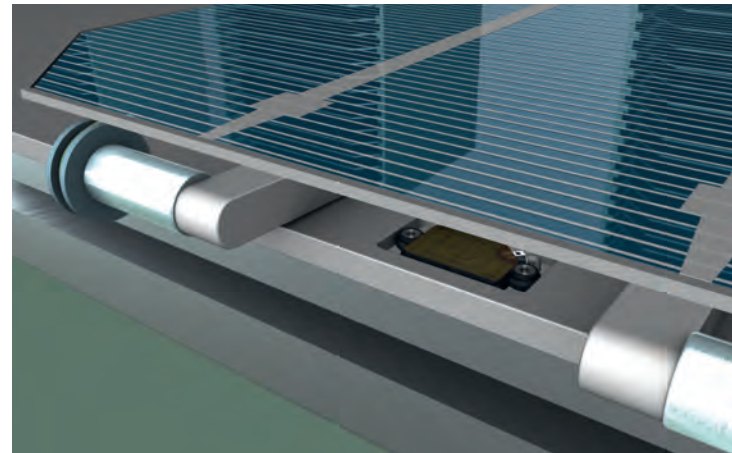


## Wafer detection in solar cell manufacturing facilities

- Reliable wafer detection thanks to large sensing distances
- Flush mounting possible thanks to flat design
- Detection regardless of transparency and brightness of the objects

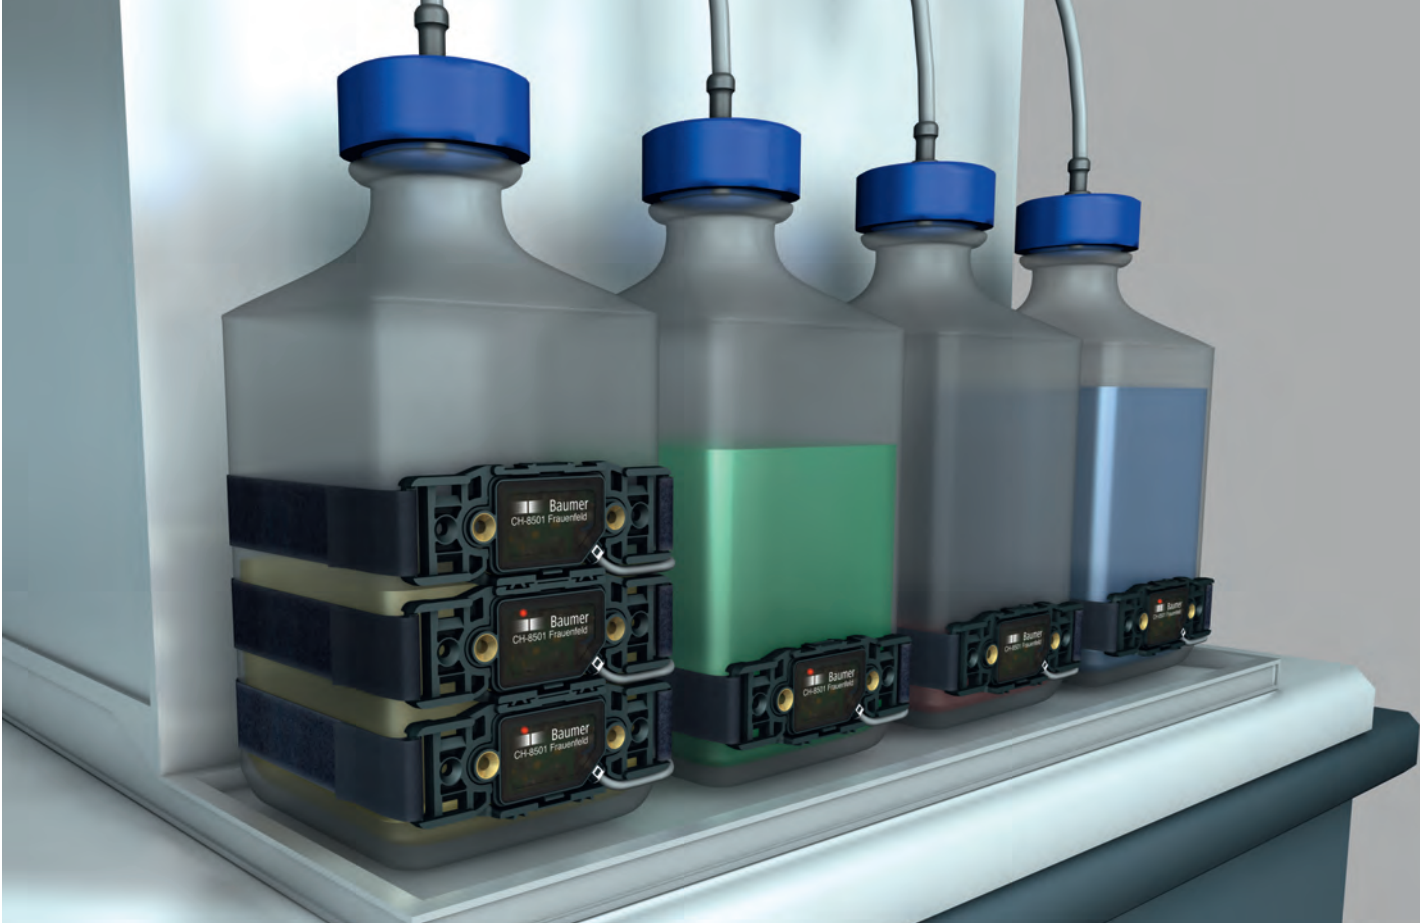


## Liquid level monitoring of return flow tanks in laboratory automation

- Fast and easy sensor installation outside the tanks
- Long lifetime thanks to robust housing
- Several self-definable monitoring areas thanks to easy cascading

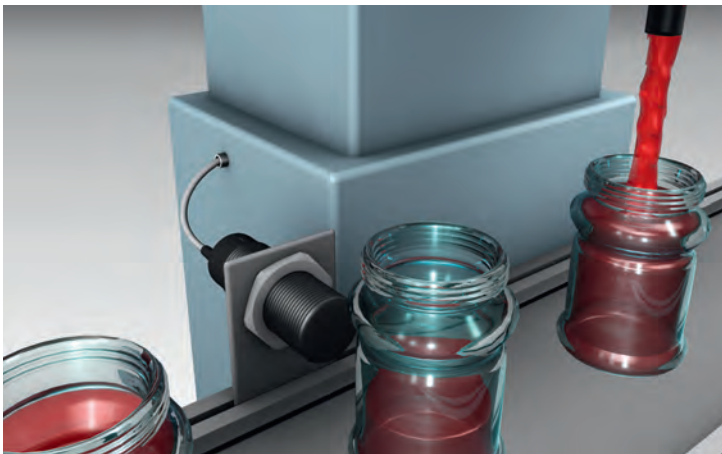

## Filling level monitoring in bottling plants

- Detection through packaging
- Quality control of closed packaging at the end of the process possible
- Color-independent detection increases process safety

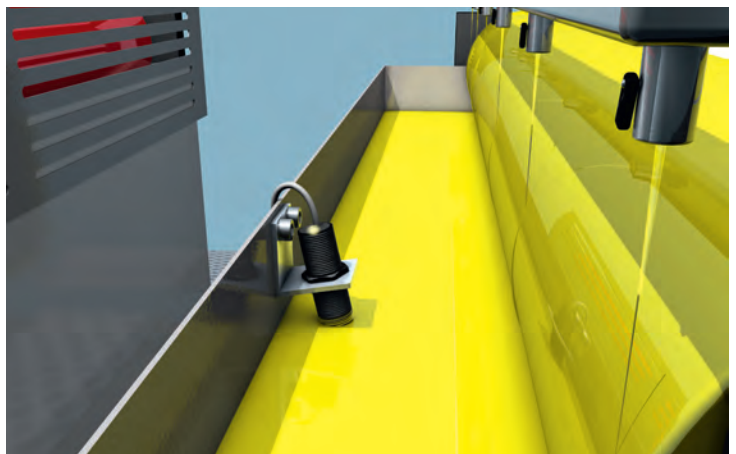

## Ink level detection in offset printing machines

- Level detection in direct contact with the liquid
- Dirt and drop retention is suppressed by the sensor
- Easy and safe functional principle



## ■ A

### Admissible lead lengths

For proximity switches large lead lengths signify load capacitance of the output and increased influence of interference signals. Lead lengths >5 m should, if possible, be avoided.

## ■ C

### Connection cable

Most capacitive sensors come standard with a highly flexible PVC cable. If higher resistance to grease and oil is required, they can also be supplied with a PUR cable. The standard cable length is 2 m.

### Current consumption

Current maximally consumed by the circuit at nominal voltage (no load).

## ■ D

### Dimension

This specification usually refers to the diameter of the sensing face. The following applies: the larger the sensing face, the greater the sensing distance ( $S_n$ ).

## ■ E

### Electrical conductivity

Electrical conductivity is the ability of a medium to conduct an electrical current. It is specified in Siemens per meter.

## ■ H

### Hysteresis

Hysteresis is the difference between the operating and switching-off point as an object approaches and moves away from the sensor.

## ■ O

### Output indicator

The LED indicates the current output.

### Oil resistance

Sensors with all-metal housing and PUR cable are suitable for applications in oily environments.

### Output protection

The sensors are protected against voltage peaks, short circuits and reverse polarity.

## ■ R

### Residual ripple

It is assumed for sensor operation that the specified voltage supply range is not exceeded or under-shot at any time. A residual ripple VR of max. 10% of the direct current average value is tolerated by the sensor within these limits.

### Repeat accuracy

Repeat accuracy is the maximum deviation of the sensing distance during 2 arbitrary measurements within 8 hours under constant conditions.

### Reverse polarity protection

The sensors are protected against voltage peaks, short circuits and reverse polarity.

## ■ S

### Sensing face

The size of the sensing face is defined by the electrodes. The larger the measuring electrode, the larger the electrical field and the greater the sensing distance.

### Sensor standard

The sensor standard is described in EN 60947-5-2:2007.

### Short circuit protection

The sensors are protected against voltage peaks, short circuits and reverse polarity.

### Load current

Specifies the maximum current that may flow through the output for an unlimited period.

### Switching frequency

The highest possible number of switching operations per second is defined in the sensor standard EN 60947.

## ■ T

### Temperature drift

Within the specified temperature range, the effective sensing distance  $S_r$  can change in relation to the nominal sensing distance  $S_n$  by the specified range.

### Operating temperature range

The sensors are designed and tested for function in the specified temperature range.

## ■ V

### Voltage drop Vd

This specification indicates the maximally dropping voltage via the controlled output.

### Voltage supply range +VS

At a maximum residual ripple of 10%, the voltage supply must not exceed and/or fall below the specified minimum and maximum values.



## Sensing distance


The international standard EN 60947-5-2 defines sensing distance as follows: sensing distance is the distance at which a standard target moving toward the sensing face of a proximity switch causes a signal change.

The sensing distance of capacitive sensors depends on the following factors

- Sensor diameter
- Sensor design (with/without GND electrode)
- Material of the medium to be detected
- Size of the approached body

### Standard target

Predefined part used for comparative measurement of sensing distances and scanning ranges. The standard target is square, 1 mm thick and made of Fe 360 (ST 37). The side length corresponds to either the diameter of the sensing face or the triple nominal sensing distance  $S_n$ , the respectively higher value being definitive. The target must be grounded.

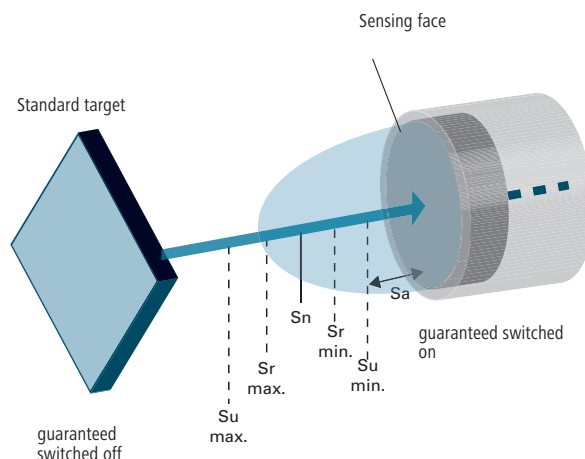

### Nominal sensing distance $S_n$

Nominal sensing distance  $S_n$  is a type classification parameter and does not take into account tolerances during machining or changes due to external conditions such as voltage or temperature.

### Usable sensing distance $S_u$

Sensing distance of an individual proximity switch measured over the temperature range and at a supply voltage of 85% and 110% of the rated value. For capacitive proximity switches it must be between 80% and 120% of the effective sensing distance.

### Effective sensing distance $S_r$

Effective sensing distance of an individual proximity switch which is measured at a defined temperature, voltage and installation conditions. For capacitive proximity switches it must be between 90% and 110% of the nominal sensing distance at  $23 \pm 5 \text{ }^\circ\text{C}$

### Assured sensing distance $S_a$

Distance from the sensing face at which the operation of the proximity switch is ensured under defined conditions. For capacitive proximity switches the assured sensing distance is between 0% and 72% of the nominal switching distance.

# Protection classes



## Protection classes



- 1) Protection from ingress of dust and complete protection against electric shock.
- 2) Protection from water jets from any direction.



IP 67 includes the IP 65 specification. In addition this class offers protection against water when the housing is immersed in water under defined pressure and time conditions (30 minutes in 1 meter deep water).



Water must not enter in a quantity that will produce harmful effects if the housing is continuously immersed in water and if conditions which are specified between the manufacturer and user are fulfilled. The conditions must however be more difficult than in IP 67.



Protection from ingress of water during high-pressure cleaning with pure water at a water pressure of 8,000 bis 10,000 kPa and a water temperature of +80 °C. The pressurization period is 30 seconds per position. Because this test procedure distinctly differs from the other IP tests, devices with the test seal IP 69K do not automatically have protection class IP 67 or IP 68. Solely devices with protection class IP 67 also have the underlying protection classes as well.




# Installation and mounting procedure



To rule out unintentional interference of the measuring field and to achieve maximum sensing distances, it is required to follow the mounting instructions and to maintain the specified minimum distances. If the minimum distances are undercut, a reduction of the sensing distances is expectable. A sensor test directly at the application is recommended.


## Mounting arrangement Flush mounting procedure

Flush mounting of flush-mountable capacitive sensors is possible in all materials. The minimum distance between the sensors must be observed.

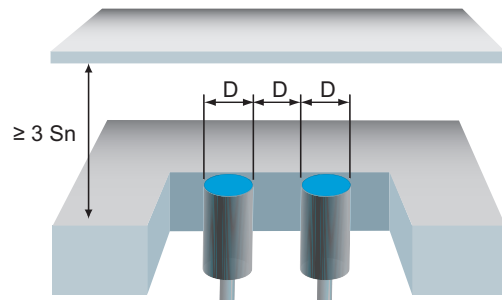


## Mounting arrangement Non-flush mounting procedure

For non-flush-mountable capacitive sensors a free zone must be created around the sensor head which must not contain any damping material.

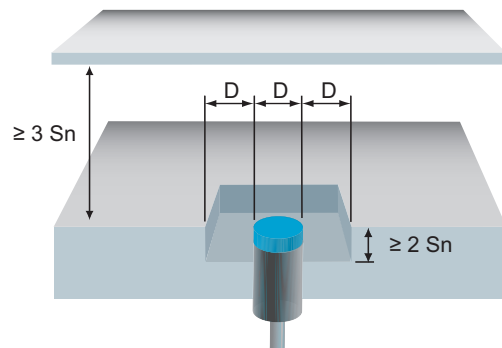


## Max. installation torques

To avoid damage during sensor installation, the specified installation torques must not be exceeded.

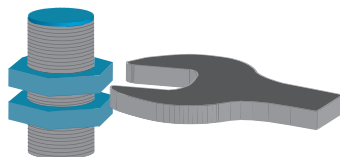

### Cylindrical housing with external thread

	Brass nickel-plated	Plastic
M12	15 Nm	1,5 Nm
M18	40 Nm	3,0 Nm
M30	200 Nm	15 Nm



### Rectangular housing

	Brass nickel-plated	Plastic
M3	0,9 Nm	0,5 Nm
M4	2,1 Nm	1,0 Nm

# Connection diagrams



## Explanatory notes on the connection diagrams


The specified diagrams indicate the undamped output. A sensor is in a damped state when an object is located in within its scanning range. In the diagrams Z denotes the typical load resistance position;  $U_z$  denotes the voltage applied to this load resistance. If  $U_z = \text{high} (\approx +V_s)$ , then current flows; if  $U_z = \text{low} (\approx 0 \text{ V})$ , then no current flows via the load resistance. Load resistance between output and  $+V_s$  is referred to as pull-up resistance, load resistance between output and  $0 \text{ V}$  as pull-down resistance.

## PNP or NPN output

Sensors with a PNP or NPN output have a 3-wire design ( $+V_s$ , output and  $0 \text{ V}$ ) and operate with direct current (DC). The load resistance of PNP sensors is between output and  $0 \text{ V}$  (pull-down resistance), while load resistance of NPN sensors is between  $+V_s$  and output (pull-up resistance). As a result, the PNP output is connected to the positive voltage supply during switching (positive switching output), whereas the NPN output is connected to the negative voltage supply during switching (negative switching output).


Normally open contacts and/or normally closed contacts define the switching function. Normally open contacts are referred to as normally open (NO), normally closed contacts as normally closed (NC). During damping with an object, sensors with normally open function establish contact connections ( $U_z = \text{high}$ ), while sensors with normally closed function disconnect connections ( $U_z = \text{low}$ ).

PNP normally open (NO)

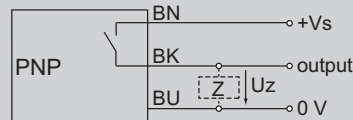


State	$U_z$	LED
undamped	low	off
damped	high	on

PNP normally closed (NC)

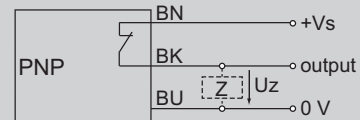


State	$U_z$	LED
undamped	high	on
damped	low	off

NPN normally open (NO)

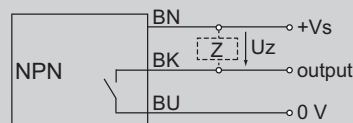

State	$U_z$	LED
undamped	low	off
damped	high	on

NPN normally closed (NC)


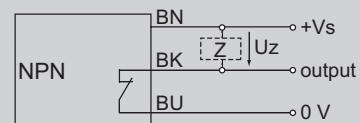


State	$U_z$	LED
undamped	high	on
damped	low	off



## Push-pull output (push-pull)

Sensors with a push-pull output have a 3-wire design like PNP or NPN sensors (+Vs, output and 0 V) and also operate with direct current (DC). Because this output is designed as a change-over, it can be used as a positive or as a negative switching output depending on the wiring. Therefore it is compatible with PNP or NPN outputs and is universally usable. If the load is connected to 0 V, the behavior of the output potential is identical to that of a sensor with a PNP output; when the load is connected to +Vs, the behavior of the the output potential is identical to that of a sensor with an NPN output. The switching function active low means that during damping with an object approx. 0 V (low) are over the load resistance; at active high approx. +Vs (high) are over the load resistance during damping. Parallel connection of push-pull sensors is possible only with corresponding wiring.

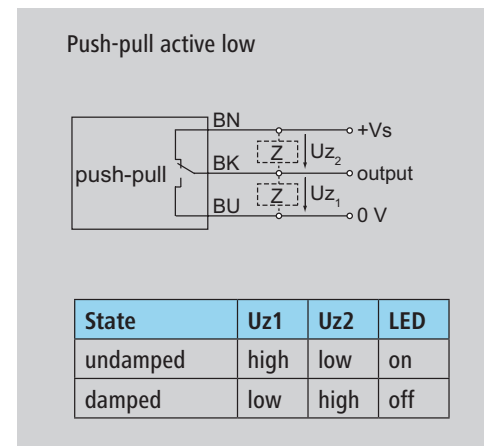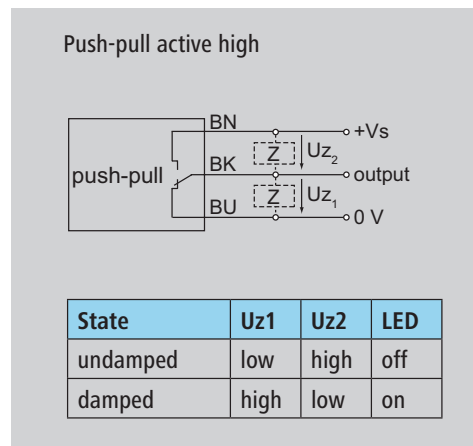


### Compatibility of push-pull and PNP/NPN

PNP normally open (NO)	push-pull active high with pull-down load
PNP normally closed (NC)	push-pull active low with pull-down load
NPN normally closed (NC)	push-pull active high with pull-up load
NPN normally open (NO)	push-pull active low with pull-up load




## Function

The capacitive sensor basically functions like an open capacitor. An electrical field is formed between the measuring electrode and the GND electrode. If a material with a dielectric constant  $\epsilon_r$  greater than air enters the electrical field, the capacity of the field increases depending on the  $\epsilon_r$  of this material. The electronics measure this capacity increase, the generated signal is conditioned during subsequent signal processing and causes output switching at a corresponding magnitude.

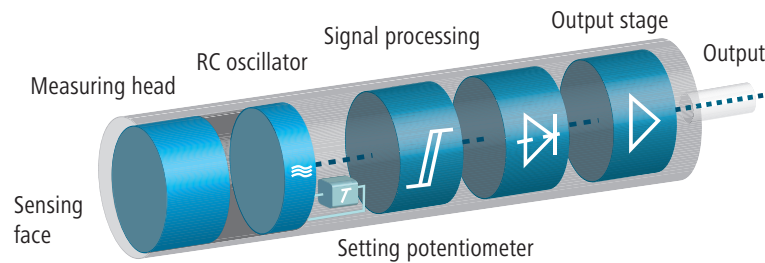


## Sensor type

### Sensors with GND electrode

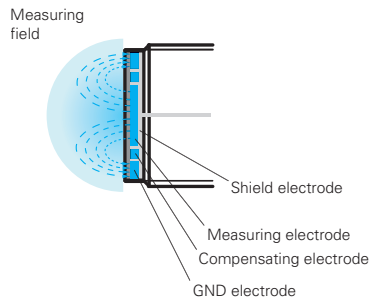

These sensors can be flush-mounted with the sensing face in a material. Because the measuring field of these sensors extends from the measuring to the integrated GND electrode, a defined measuring field is created. They are particularly suitable for detecting non-conductive materials such as oils, glass, wood or plastics, but can also detect conductive materials just as well. To prevent undesired switching and moisture on the sensor surface, a compensating electrode was integrated to suppress undesired objects

### Sensors without a GND electrode

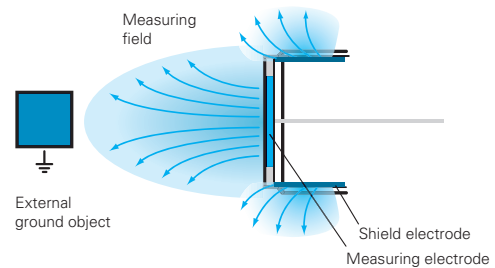

Generally these sensors cannot be flush mounted. Since they do not have a GND electrode, the object to be detected performs the function of a GND electrode. Sensors without a GND electrode feature low sensitivity to soiling and condensation and are suitable especially for level tasks. To achieve long sensing distances, the medium to be detected should be conductive and optimally grounded.



## Dielectric constant

Capacitive sensors detect conductive as well as non-conductive media with a dielectric constant  $\epsilon_r > 1$ . The dielectric constant  $\epsilon_r$  (also relative permittivity or inductive capacitance) of a material indicates how many times greater the electric flux density will become if instead of vacuum (air) the corresponding material enters the measuring field.


## Conductive media

Conductive media typically has an electrical conductivity  $> 20 \mu\text{S/cm}$ . Conductive material can easily be detected by all sensor types whether they have a GND electrode or not. In conductive media the dielectric constant is irrelevant for the sensing distance. The sensing distance is influenced by the size of the object and its grounding.

- Conductive media include:
- Water
  - Blood
  - Ink
  - Milk
  - Acetone
  - Metals

## Non-conductive media

Non-conductive media typically has an electrical conductivity  $< 20 \mu\text{S/cm}$ . In general sensors with a GND electrode are recommended for non-conductive media. If a non-conductive object is moved into the sensor field, the field increases depending on the dielectric constant and the size of the material to be detected, increasing the capacity of the measuring field. The lower  $\epsilon_r$  is, the harder it is to detect the medium. Generally it can be said that e.g. for plastics with  $\epsilon_r = 3$  the effective sensing distance  $S_r$  corresponds to approximately 50% of the nominal sensing distance  $S_n$ .

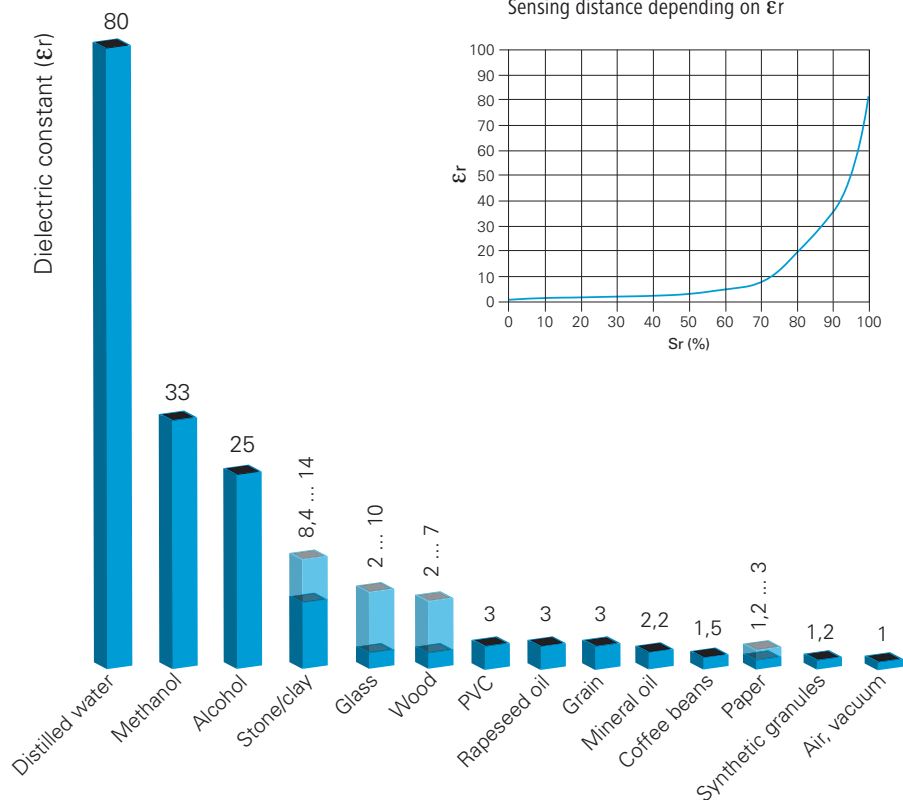




To facilitate the selection of the right capacitive sensor, this double page provides an initial overview of suitable sensors based on the task and type of medium to be detected

## Task




### Level detection in direct contact

Capacitive sensors in especially robust plastic and metal housings are very suitable for level detection in direct contact with the medium. The sensors feature high chemical and mechanical resistance. They are installed through an opening in the container wall or inside the container. The internal compensating electrode prevents switching errors caused by sediments and moisture on the sensing face. Sensors with a fully enclosed housing are preferable for applications with direct media contact.

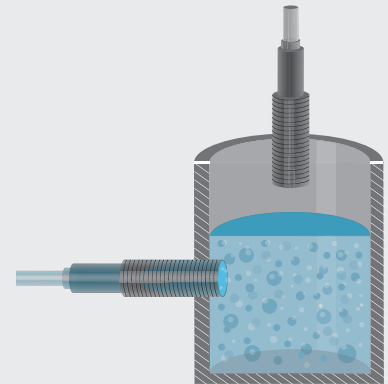


### Level detection through container walls

Capacitive sensors can detect media through non-conductive container walls without any problems. This is a big benefit particularly in closed containers, chemically aggressive media or in media which must not be contaminated. The higher the dielectric constant or conductivity of the medium to be detected, the better it can be detected by the sensor through the container wall.

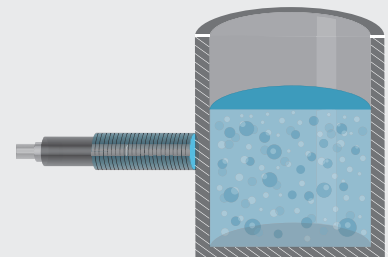

### Object detection / bulk goods

Capacitive sensors can detect all kinds of objects without any problems. The better the level of conductivity and grounding of an object is, the higher is the level of signal reserves and detection reliability. Because many capacitive sensors can be flush mounted, they are suitable for protected, space-saving installation

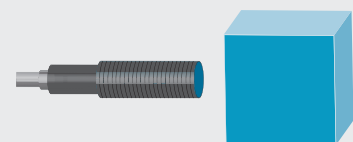

## Suitable sensors (selection)

### Conductive medium



CFAK 12  
(Sn = 0,5 mm)



CFAK 18  
(Sn = 5 mm)



CFAK 18  
(Sn = 15 mm)



CFDK 25  
(Sn = 4 mm)



CFAK 18  
(Sn = 15 mm)



CFAK 30  
(Sn = 30 mm)



CFDK 25  
(Sn = 8 mm)



CFAK 18  
(Sn = 15 mm)



CFAK 30  
(Sn = 30 mm)

### Non-conductive medium



CFAK 18  
(Sn = 15 mm)



CFAK 30  
(Sn = 8 mm)



CFAK 30  
(Sn = 30 mm)



CFDK 25  
(Sn = 8 mm)



CFAM 18  
(Sn = 8 mm)



CFAM 30  
(Sn = 15 mm)




CFDK 25  
(Sn = 15 mm)



CFAM 12  
(Sn = 4 mm)



CFAM 18  
(Sn = 8 mm)

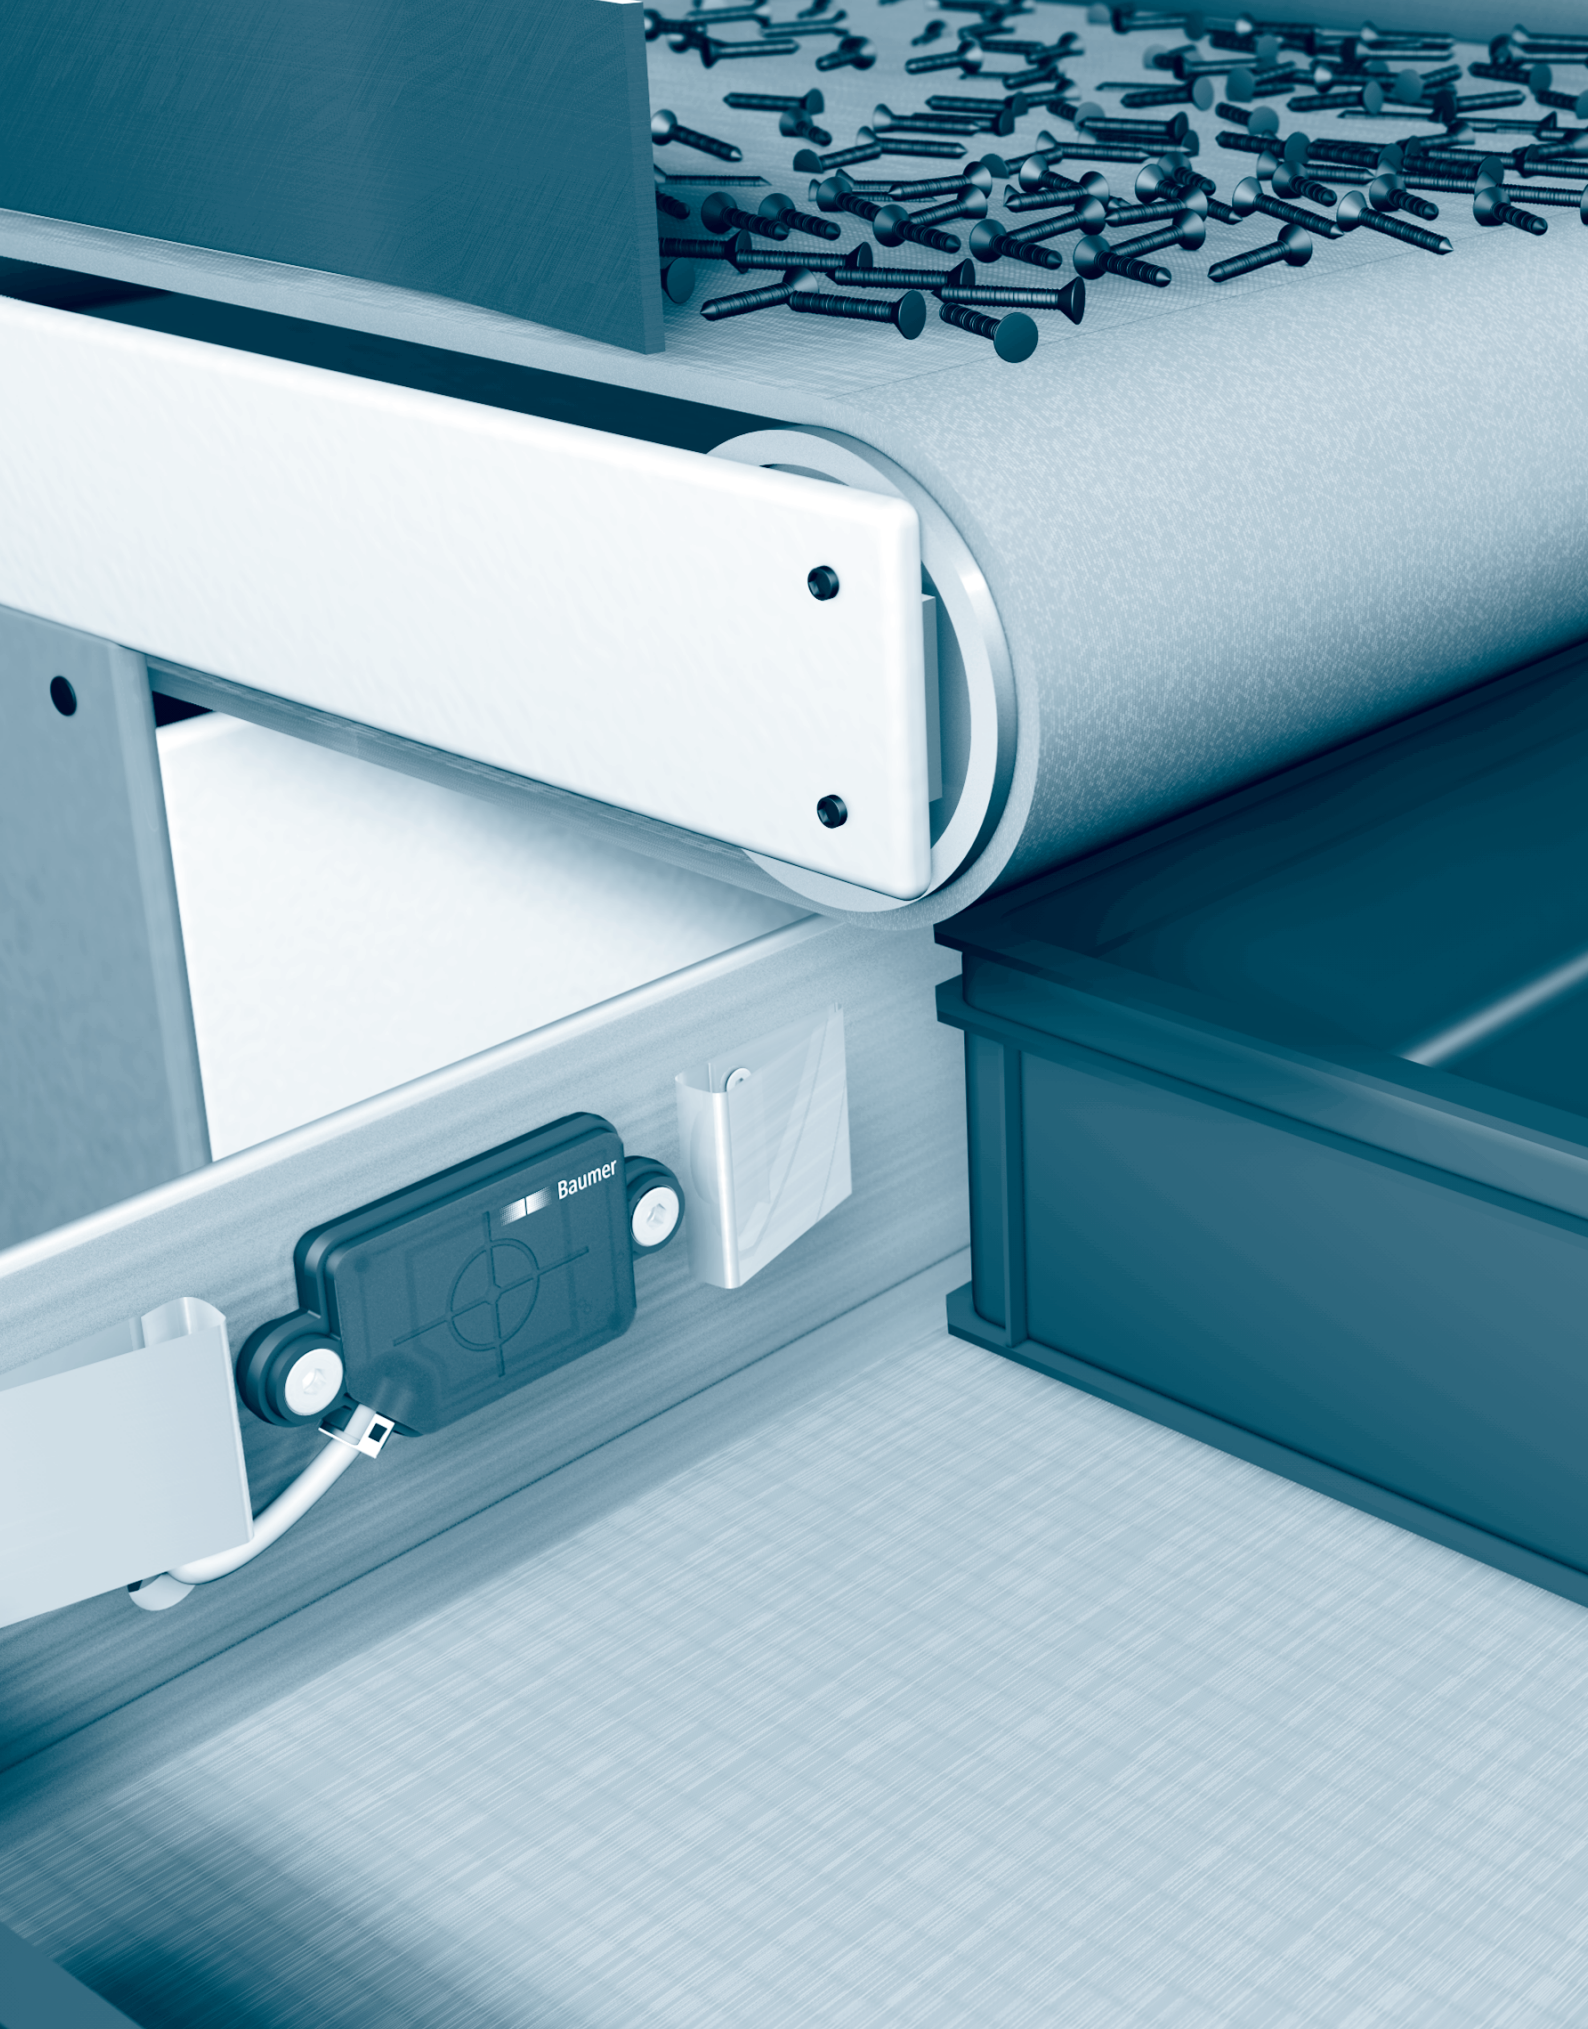












## Capacitive sensors






Overview	Page 18
Cylindrical designs	Page 20
Rectangular designs	Page 33
Accessories	Page 41

cylindrical designs

product family	CFAK 12	CFAK 12	CFAM 12	CFAK 18	CFAK 18	CFAM 18	CFBM 20
							
nominal sensing distance Sn	0,1 mm	0,5 mm	4 mm	5 mm	15 mm	8 mm	10 mm
mounting type	non-flush	non-flush	flush	non-flush	non-flush	flush	flush
GND electrode	no	no	yes	no	no	yes	yes
dimension	12 mm	12 mm	12 mm	18 mm	18 mm	18 mm	20 mm
housing material	POM	PBT	brass nickel plated	PBT	PBT	brass nickel plated	brass nickel plated
sensitivity adjustment	no	no	potentiometer, 240°	no	potentiometer, 12 turn	potentiometer, 12 turn	potentiometer, 18 turn
protection class	IP 67	IP 67	IP 65	IP 67/65 (sensing face/sensor)	IP 67/65 (sensing face/sensor)	IP 65	IP 65
detection of non-conductive media	no	no	yes	yes	yes	yes	yes
fill level detection through container	no	no	yes	yes	yes	yes	yes
liquids in direct contact	yes	yes	no	yes	yes	no	no
object detection / bulk goods	no	no	yes	yes	yes	yes	yes
<b>page</b>	<b>20</b>	<b>22</b>	<b>23</b>	<b>24</b>	<b>25</b>	<b>26</b>	<b>27</b>

rectangular designs

product family	CFDM 20	CFDK 25	CFDK 25	CFDK 25	CFDK 25	CFDK 25	CFDK 30
							
nominal sensing distance Sn	5 mm	2 mm	4 mm	8 mm	12 mm	15 mm	15 mm
mounting type	flush	flush	flush	flush	flush	non-flush	flush
GND electrode	yes	no	no	no	no	no	yes
dimension	20 mm	25 mm	25 mm	25 mm	25 mm	25 mm	30 mm
housing material	brass nickel plated	PA 12	PA 12	PA 12	PA 12	PA 12	PBT
sensitivity adjustment	no	no	no	no	no	no	potentiometer, 15 turn
protection class	IP 65	IP 65	IP 65	IP 65	IP 65	IP 65	IP 65
detection of non-conductive media	yes	no	no	yes	yes	yes	yes
fill level detection through container	yes	yes	yes	yes	no	no	yes
liquids in direct contact	no	no	no	no	no	no	no
object detection / bulk goods	yes	no	no	yes	yes	yes	yes
<b>page</b>	<b>33</b>	<b>34</b>	<b>35</b>	<b>36</b>	<b>37</b>	<b>38</b>	<b>39</b>

CFAK 22	CFAK 30	CFAK 30	CFAM 30	CFAH 30
				
	8 mm	30 mm	15 mm	15 mm
non-flush	non-flush	non-flush	flush	non-flush
	no	no	yes	no
22 mm	30 mm	30 mm	30 mm	30 mm
PA 10T/X	PBT	PBT	brass nickel plated	V2A/PTFE
	no	potentiometer, 18 turn	potentiometer, 18 turn	potentiometer, 18 turn
IP 69K	IP 67/65 (sensing face/sensor)	IP 67/65 (sensing face/sensor)	IP 65	IP 67
no	yes	yes	yes	yes
no	yes	yes	yes	no
yes	yes	yes	no	yes
no	yes	yes	yes	no
<b>28</b>	<b>29</b>	<b>30</b>	<b>31</b>	<b>32</b>



Sn = 0,1 mm



- Use in soiled, conductive media
- Suppression of dirt and cleaning agents
- For installation in grounded metal containers

general data	
special type	liquid level sensor for wastewater
nominal sensing distance Sn	0,1 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 20 %
sensitivity adjustment	no
output indicator	LED yellow
measurement type	contact with medium

electrical data	
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output current	< 200 mA
voltage drop Vd	< 2,5 VDC
switching frequency	< 15 Hz
short circuit protection	yes
reverse polarity protection	yes

mechanical data	
type	cylindrical threaded
housing material	POM
material (screw nut)	POM
material (gasket)	EPDM50
dimension	12 mm
housing length	39,5 mm


ambient conditions	
operating temperature	0 ... +50 °C
protection class	IP 67

field of application	
detection of non-conductive media	no
fill level detection through container	no
liquids in direct contact	yes
object detection / bulk goods	no


connectors and mating connectors	
ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	

Accessories	
10161959	Converter PNP/NPN - M8 x 1
11163236	Adapter for pulse stretching M8
for details: see accessories section	

dimension drawings

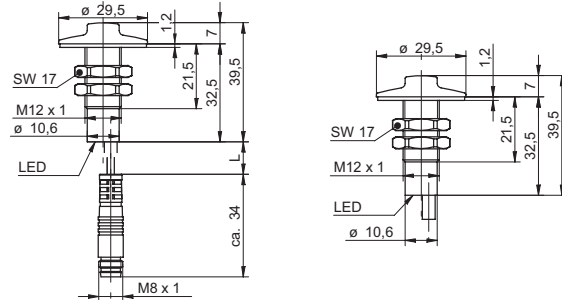

connection diagrams

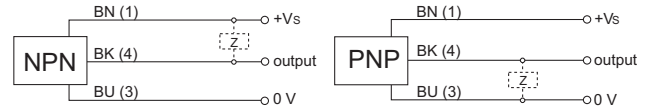

order reference	output circuit	connection types
CFAK 12N1140/KS35L	NPN make function (NO)	flylead connector M8, L=200 mm
CFAK 12N1140/L	NPN make function (NO)	cable, 2 m
CFAK 12N3140/KS35L	NPN break function (NC)	flylead connector M8, L=200 mm
CFAK 12N3140/L	NPN break function (NC)	cable, 2 m
CFAK 12P1140/KS35L	PNP make function (NO)	flylead connector M8, L=200 mm
CFAK 12P1140/L	PNP make function (NO)	cable, 2 m
CFAK 12P3140/KS35L	PNP break function (NC)	flylead connector M8, L=200 mm
CFAK 12P3140/L	PNP break function (NC)	cable, 2 m



Sn = 0,5 mm



- Level control of optimally conductive liquids
- Suitable for direct contact
- Suppression of dirt and drops

general data	
nominal sensing distance Sn	0,5 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 20 %
sensitivity adjustment	no
output indicator	LED yellow
measurement type	contact with medium

electrical data	
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output current	< 200 mA
voltage drop Vd	< 2,5 VDC
switching frequency	< 15 Hz
short circuit protection	yes
reverse polarity protection	yes

mechanical data	
type	cylindrical threaded
housing material	PBT
dimension	12 mm
housing length	39 mm
connection types	cable, 2 m


ambient conditions	
operating temperature	0 ... +70 °C
protection class	IP 67

field of application	
detection of non-conductive media	no
fill level detection through container	no
liquids in direct contact	yes
object detection / bulk goods	no


Accessories	
10151720	Sensofix series 12 round
for details: see accessories section	

order reference	output circuit
CFAK 12N1103	NPN make function (NO)
CFAK 12N3103	NPN break function (NC)
CFAK 12P1103	PNP make function (NO)
CFAK 12P3103	PNP break function (NC)

dimension drawing



connection diagrams

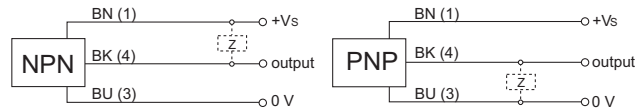


remarks

Other housing materials are available on request



**Sn = 4 mm**

- Versatile
- Sensitivity adjustment via pot
- Flush mounting possible

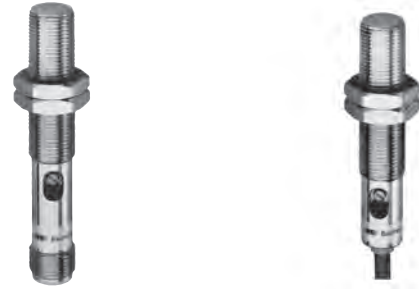

### general data

nominal sensing distance Sn	4 mm
nominal sensing distance Sn adjustable	0,5 ... 4 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 240°
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	12 mm

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 65

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes

### connectors and mating connectors

ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

### Accessories


10151720	Sensofix series 12 round
10161958	Converter PNP/NPN - M12 x 1
11163237	Adapter for pulse stretching M12

for details: see accessories section

### dimension drawings

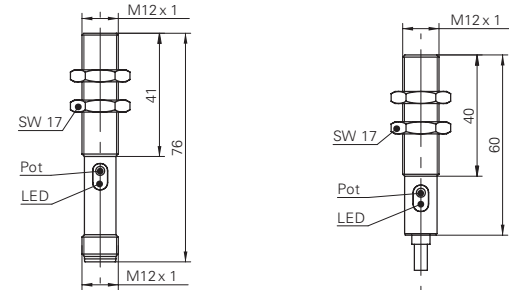

### connection diagrams

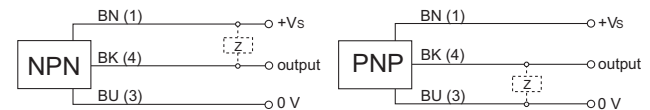

order reference	housing length	output circuit	connection types
CFAM 12N1600	60 mm	NPN make function (NO)	cable, 2 m
CFAM 12N1600/S14	76 mm	NPN make function (NO)	connector M12
CFAM 12N3600	60 mm	NPN break function (NC)	cable, 2 m
CFAM 12N3600/S14	76 mm	NPN break function (NC)	connector M12
CFAM 12P1600	60 mm	PNP make function (NO)	cable, 2 m
CFAM 12P1600/S14	76 mm	PNP make function (NO)	connector M12
CFAM 12P3600	60 mm	PNP break function (NC)	cable, 2 m
CFAM 12P3600/S14	76 mm	PNP break function (NC)	connector M12



Sn = 5 mm



- Preset sensing distance
- Fully enclosed housing
- Direct contact with liquids possible

**general data**

nominal sensing distance Sn	5 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 15 % (0 ... +70 °C)
sensitivity adjustment	no
output indicator	LED yellow

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	cylindrical threaded
housing material	PBT
dimension	18 mm
housing length	63,5 mm
connection types	cable, 2 m

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 67/65 (sensing face/sensor)

**field of application**

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	yes
object detection / bulk goods	yes


**Accessories**

10151658	Sensofix series 18
for details: see accessories section	


**order reference**      **output circuit**

<b>CFAK 18N1100</b>	NPN make function (NO)
<b>CFAK 18N3100</b>	NPN break function (NC)
<b>CFAK 18P1100</b>	PNP make function (NO)
<b>CFAK 18P3100</b>	PNP break function (NC)

**dimension drawing**

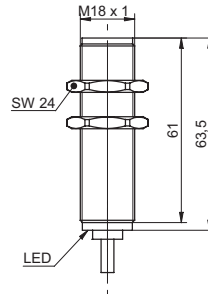

**connection diagrams**

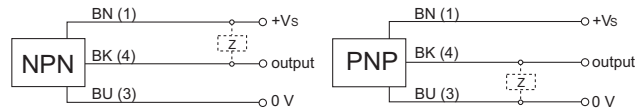





**Sn = 15 mm**

- Sensitivity adjustment via pot
- Fully enclosed housing
- Direct contact with liquids possible



### general data

nominal sensing distance Sn	15 mm
nominal sensing distance Sn adjustable	2 ... 15 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 12 turn
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical threaded
housing material	PBT
dimension	18 mm
housing length	63,5 mm
connection types	cable, 2 m

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67/65 (sensing face/sensor)

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	yes
object detection / bulk goods	yes


### Accessories

10151658	Sensofix series 18
for details: see accessories section	


### order reference      output circuit

<b>CFAK 18N1200</b>	NPN make function (NO)
<b>CFAK 18N3200</b>	NPN break function (NC)
<b>CFAK 18P1200</b>	PNP make function (NO)
<b>CFAK 18P3200</b>	PNP break function (NC)

### dimension drawing

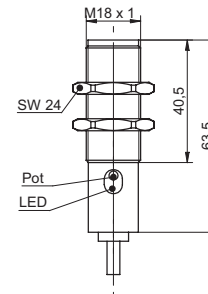

### connection diagrams

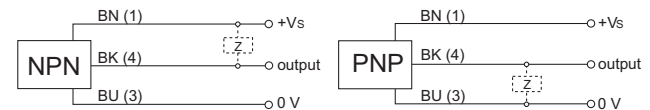


CFAK 18 Sn = 15 mm

Capacitive proximity sensors



**Sn = 8 mm**

- Versatile
- Sensitivity adjustment via pot
- Flush mounting possible

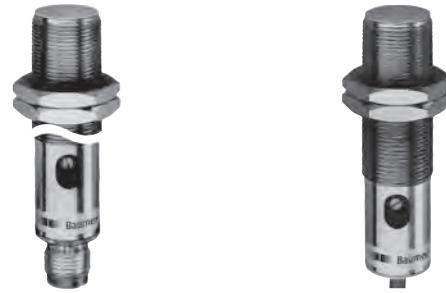

### general data

nominal sensing distance Sn	8 mm
nominal sensing distance Sn adjustable	2 ... 8 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 12 turn
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	18 mm

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 65

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes

### connectors and mating connectors

ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

### Accessories


10151658	Sensofix series 18
10161958	Converter PNP/NPN - M12 x 1
11163237	Adapter for pulse stretching M12

for details: see accessories section

### dimension drawings

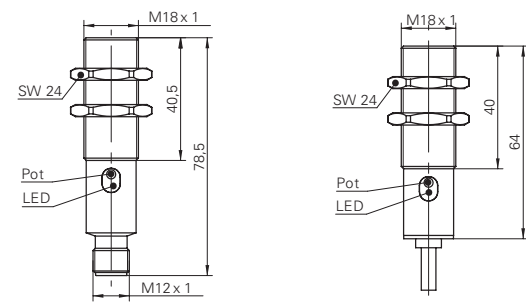

### connection diagrams

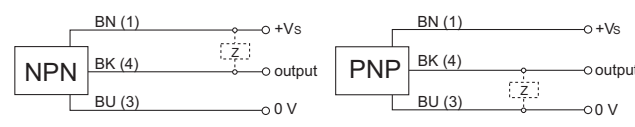

order reference	housing length	output circuit	connection types
<b>CFAM 18N1600</b>	64 mm	NPN make function (NO)	cable, 2 m
<b>CFAM 18N1600/S14</b>	78,5 mm	NPN make function (NO)	connector M12
<b>CFAM 18N3600</b>	64 mm	NPN break function (NC)	cable, 2 m
<b>CFAM 18N3600/S14</b>	78,5 mm	NPN break function (NC)	connector M12
<b>CFAM 18P1600</b>	64 mm	PNP make function (NO)	cable, 2 m
<b>CFAM 18P1600/S14</b>	78,5 mm	PNP make function (NO)	connector M12
<b>CFAM 18P3600</b>	64 mm	PNP break function (NC)	cable, 2 m
<b>CFAM 18P3600/S14</b>	78,5 mm	PNP break function (NC)	connector M12

CFAM 18 Sn = 8 mm

Capacitive proximity sensors



**Sn = 10 mm**

- Smooth housing for installation with support bracket
- Sensitivity adjustment via pot
- Flush mounting possible

### general data

nominal sensing distance Sn	10 mm
nominal sensing distance Sn adjustable	2 ... 10 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 18 turn
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 2,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical smooth
housing material	brass nickel plated
dimension	20 mm
housing length	79,5 mm
connection types	cable, 2 m

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 65

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes

### Accessories


10143377	Mounting bracket for sensors Ø 20 mm
for details: see accessories section	

### order reference


order reference	output circuit
CFBM 20N1600	NPN make function (NO)
CFBM 20N3600	NPN break function (NC)
CFBM 20P1600	PNP make function (NO)
CFBM 20P3600	PNP break function (NC)



### dimension drawing

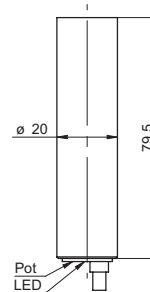

### connection diagrams

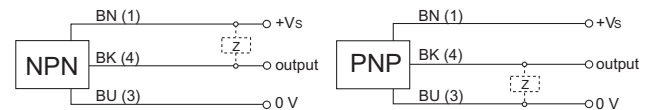

### remarks

Mounting bracket included in delivery

CFBM 20 Sn = 10 mm

Capacitive proximity sensors



Sn = 0,5 mm



- Level control of optimally conductive liquids
- Suitable for direct contact
- Suppression of dirt and drops

general data	
special type	liquid level sensor for oil
mounting type	non-flush
version	adhesion resistant
measurement type	contact with medium
approvals/certificates	EN 60947-5-2 / EN 60947-5-7 EN ISO 14982:2009 ISO 15003:2006, Sec 5.13 ISO 13766:2006-05 EN 13309:2010

electrical data	
voltage supply range +Vs	4,75 ... 5,25 VDC
current consumption max. (no load)	42 mA
current consumption typ.	10 mA
output circuit	voltage output
output state	in air 2,75 ... 3,25 V in liquid 1,25 ... 1,75 V fault 0,50 ... 1,00 V
typ. response time	< 1000 ms
load resistance	≥ 930 Ohm
capacitive load	< 200 nF
short circuit protection	yes
reverse polarity protection	no


mechanical data	
type	cylindrical threaded
housing material	PA 10T/X
dimension	22 mm
housing length	87 mm
connection types	connector AMPSEAL 16 3 pin
tightening torque max.	14 Nm (min. 10 Nm)
fluid port	O-Ring port M22 x 1,5 (ISO 6149-1)

ambient conditions	
operating temperature	-40 ... +85 °C
media temperature	-40 ... +100 °C
storage temperature	-55 ... +125 °C
protection class	IP 69K


field of application	
detection of non-conductive media	no
fill level detection through container	no
liquids in direct contact	yes
object detection / bulk goods	no

order reference	
CFAK 22U9500/AMP	

dimension drawing

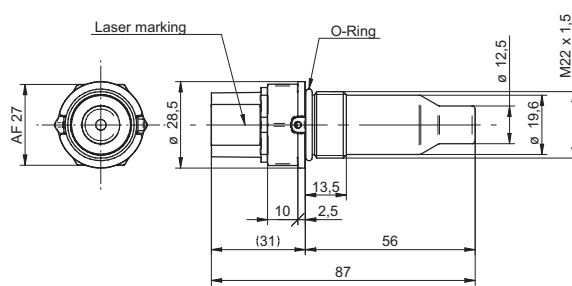

connection diagram

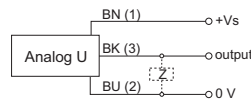

remarks

Other housing materials are available on request



**Sn = 8 mm**

- Preset sensing distance
- Fully enclosed housing
- Direct contact with liquids possible



### general data

nominal sensing distance Sn	8 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 15 % (0 ... +70 °C)
sensitivity adjustment	no
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical threaded
housing material	PBT
dimension	30 mm
housing length	72 mm
connection types	cable, 2 m


### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67/65 (sensing face/sensor)


### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	yes
object detection / bulk goods	yes

### dimension drawing



### connection diagrams

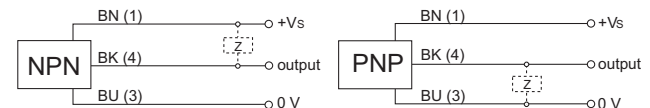

### order reference

order reference	output circuit
CFAK 30N1100	NPN make function (NO)
CFAK 30N3100	NPN break function (NC)
CFAK 30P1100	PNP make function (NO)
CFAK 30P3100	PNP break function (NC)

CFAK 30 Sn = 8 mm

Capacitive proximity sensors



Sn = 30 mm

- Sensitivity adjustment via pot
- Fully enclosed housing
- Direct contact with liquids possible



**general data**

nominal sensing distance Sn	30 mm
nominal sensing distance Sn adjustable	5 ... 30 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 18 turn
output indicator	LED yellow

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	cylindrical threaded
housing material	PBT
dimension	30 mm
housing length	72 mm
connection types	cable, 2 m


**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 67/65 (sensing face/sensor)


**field of application**

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	yes
object detection / bulk goods	yes

**dimension drawing**

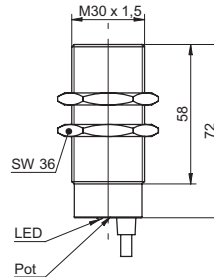

**connection diagrams**

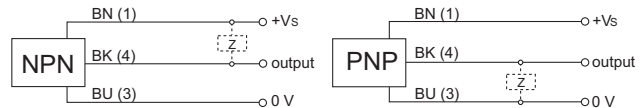

**order reference**      **output circuit**

CFAK 30N1200	NPN make function (NO)
CFAK 30N3200	NPN break function (NC)
CFAK 30P1200	PNP make function (NO)
CFAK 30P3200	PNP break function (NC)



**Sn = 15 mm**

- Particularly suitable for non-conductive media
- Sensitivity adjustment via pot
- Flush mounting possible



### general data

nominal sensing distance Sn	15 mm
nominal sensing distance Sn adjustable	4 ... 15 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 18 turn
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	30 mm

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 65

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes


### connectors and mating connectors

ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


### Accessories

10161958	Converter PNP/NPN - M12 x 1
11163237	Adapter for pulse stretching M12
for details: see accessories section	

### dimension drawings

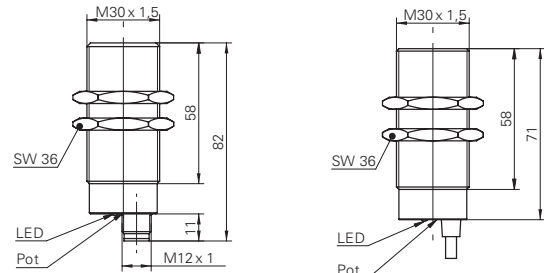

### connection diagrams




order reference	housing length	output circuit	connection types
CFAM 30N1600	71 mm	NPN make function (NO)	cable, 2 m
CFAM 30N1600/S14	82 mm	NPN make function (NO)	connector M12
CFAM 30N3600	71 mm	NPN break function (NC)	cable, 2 m
CFAM 30N3600/S14	82 mm	NPN break function (NC)	connector M12
CFAM 30P1600	71 mm	PNP make function (NO)	cable, 2 m
CFAM 30P1600/S14	82 mm	PNP make function (NO)	connector M12
CFAM 30P3600	71 mm	PNP break function (NC)	cable, 2 m
CFAM 30P3600/S14	82 mm	PNP break function (NC)	connector M12



Sn = 15 mm

- High temperature proof to +200 °C
- Resistent against a high number of chemicals
- Probe made of stainless steel & PTFE (anti-adherence)

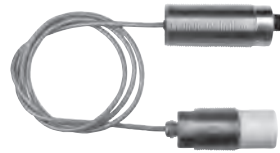

**general data**

special type	sensor for high temperatures
nominal sensing distance Sn	15 mm
nominal sensing distance Sn adjustable	4 ... 15 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 16 %
sensitivity adjustment	potentiometer, 18 turn
output indicator	LED

**electrical data**

voltage supply range +Vs	10 ... 35 VDC
current consumption max. (no load)	15 mA
output current	< 200 mA
voltage drop Vd	< 2,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	cylindrical threaded
housing material	V2A/PTFE
dimension	30 mm
housing length	65 mm
connection types	connector M12

**ambient conditions**

operating temperature	-40 ... +200 °C
protection class	IP 67

**field of application**

detection of non-conductive media	yes
fill level detection through container	no
liquids in direct contact	yes
object detection / bulk goods	no

**inline amplifier**

operating temperature	-25 ... +75 °C
housing material	brass nickel plated
protection class	IP 65

**connectors and mating connectors**

ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

**Accessories**


10161958	Converter PNP/NPN - M12 x 1
11163237	Adapter for pulse stretching M12

for details: see accessories section


**order reference                      output circuit**

<b>CFAH 30P1200/S14</b>	PNP make function (NO)
<b>CFAH 30P3200/S14</b>	PNP break function (NC)

**dimension drawing**

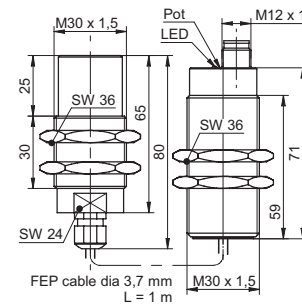

**connection diagram**



CFAH 30 Sn = 15 mm

Capacitive proximity sensors





Sn = 5 mm

- Preset sensing distance
- Compact, flat metal housing
- Flexible and easy installation options



**general data**

nominal sensing distance Sn	5 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	no
output indicator	4 port LED

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	brass nickel plated
dimension	20 mm
housing length	35 mm
connection types	connector M8

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes

**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m

additional cable connectors and field wireable connectors: see accessories

**Accessories**


10152385	Sensofix series 18/20 inductive rectangular
10161959	Converter PNP/NPN - M8 x 1
11163236	Adapter for pulse stretching M8

for details: see accessories section


**order reference      output circuit**

<b>CFDM 20N1500/S35L</b>	NPN make function (NO)
<b>CFDM 20N3500/S35L</b>	NPN break function (NC)
<b>CFDM 20P1500/S35L</b>	PNP make function (NO)
<b>CFDM 20P3500/S35L</b>	PNP break function (NC)

**dimension drawing**



**connection diagrams**

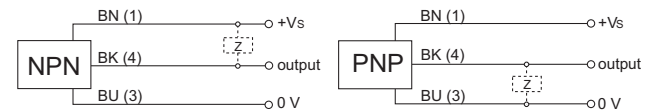



Sn = 2 mm



- Particularly suitable for conductive liquids
- Extremely compact, flat housing
- Flexible installation options thanks to accessories

**general data**

nominal sensing distance Sn	2 mm
mounting type	flush
GND electrode	no
temperature drift	± 15 %
sensitivity adjustment	no
output indicator	LED red

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
switching frequency	< 35 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	PA 12
dimension	25 mm
housing length	52,4 mm
depth	6 mm

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	no
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	no

**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

**Accessories**


HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
BX 20-360-1	Velcro strip cut to length 360 mm

for details: see accessories section

**dimension drawings**

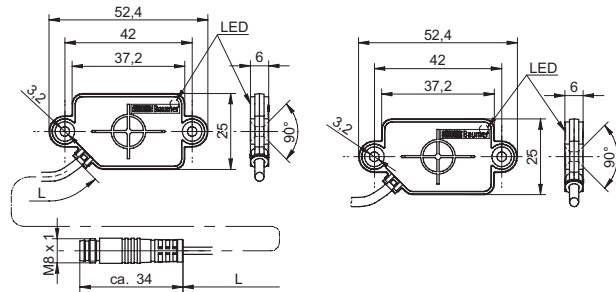

**connection diagram**

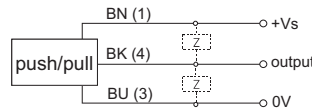

**order reference**

CFDK 25G1125/KS35LN1

**output function**

active high

**connection types**

flylead connector M8, L=200 mm

CFDK 25G1125/LN1

active high

cable PVC 3 x 0,14, 2 m

CFDK 25G3125/LN1

active low

cable PVC 3 x 0,14, 2 m



Sn = 4 mm

- Particularly suitable for conductive liquids
- Extremely compact, flat housing
- Flexible installation options thanks to accessories



**general data**

nominal sensing distance Sn	4 mm
mounting type	flush
GND electrode	no
temperature drift	± 15 %
sensitivity adjustment	no
output indicator	LED red

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
switching frequency	< 35 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	PA 12
dimension	25 mm
housing length	52,4 mm
depth	6 mm

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	no
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	no

**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

**Accessories**


HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
BX 20-360-1	Velcro strip cut to length 360 mm

for details: see accessories section

**dimension drawings**

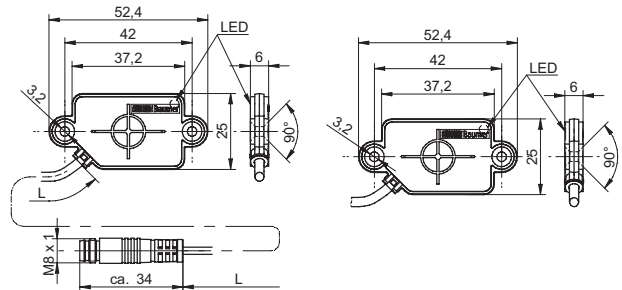

**connection diagram**

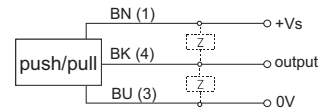

order reference	output function	connection types
CFDK 25G1125/KS35LN3	active high	flylead connector M8, L=200 mm
CFDK 25G1125/LN3	active high	cable PVC 3 x 0,14, 2 m
CFDK 25G3125/LN3	active low	cable PVC 3 x 0,14, 2 m

CFDK 25 Sn = 4 mm

Capacitive proximity sensors



Sn = 8 mm



- Suitable for liquids and objects
- Extremely compact, flat housing
- Flexible installation options thanks to accessories

**general data**

nominal sensing distance Sn	8 mm
mounting type	flush
GND electrode	no
temperature drift	± 20 %
sensitivity adjustment	no
output indicator	LED red

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
switching frequency	< 35 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	PA 12
dimension	25 mm
housing length	52,4 mm
depth	6 mm

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes


**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


**Accessories**

HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
BX 20-360-1	Velcro strip cut to length 360 mm
for details: see accessories section	

**dimension drawings**

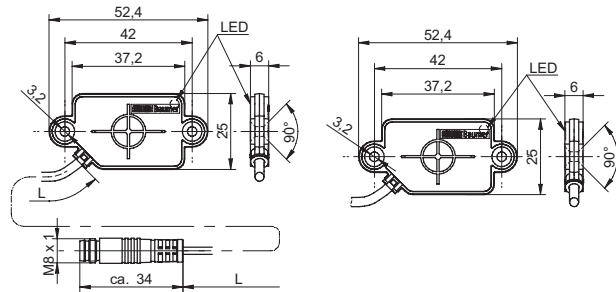

**connection diagram**

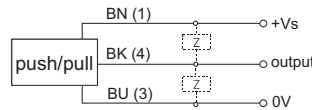

order reference	output function	connection types
CFDK 25G1125/KS35LN4	active high	flylead connector M8, L=200 mm
CFDK 25G1125/LN4	active high	cable PVC 3 x 0,14, 2 m
CFDK 25G3125/LN4	active low	cable PVC 3 x 0,14, 2 m



Sn = 12 mm

- Particularly suitable for non-conductive objects
- Extremely compact, flat housing
- Flexible installation options thanks to accessories



**general data**

nominal sensing distance Sn	12 mm
mounting type	flush
GND electrode	no
temperature drift	± 20 %
sensitivity adjustment	no
output indicator	LED red

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
switching frequency	< 35 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	PA 12
dimension	25 mm
housing length	52,4 mm
depth	6 mm

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	yes
fill level detection through container	no
liquids in direct contact	no
object detection / bulk goods	yes

**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

**Accessories**


HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
BX 20-360-1	Velcro strip cut to length 360 mm

for details: see accessories section

**dimension drawings**

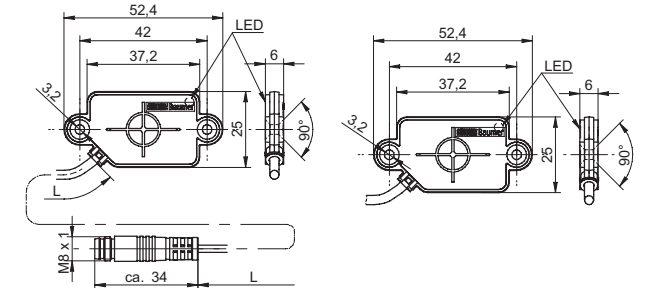

**connection diagram**

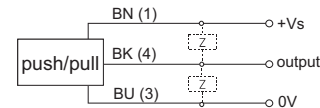

order reference	output function	connection types
CFDK 25G1125/KS35LN5	active high	flylead connector M8, L=200 mm
CFDK 25G1125/LN5	active high	cable PVC 3 x 0,14, 2 m
CFDK 25G3125/LN5	active low	cable PVC 3 x 0,14, 2 m

CFDK 25 Sn = 12 mm Capacitive proximity sensors



Sn = 15 mm



- Particularly suitable for non-conductive objects
- Extremely compact, flat housing
- Flexible installation options thanks to accessories

**general data**

nominal sensing distance Sn	15 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 20 % (0 ... +75 °C) ± 30 % (-25 ... 0 °C)
sensitivity adjustment	no
output indicator	LED red

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
switching frequency	< 35 Hz
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
housing material	PA 12
dimension	25 mm
housing length	52,4 mm
depth	6 mm

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 65

**field of application**

detection of non-conductive media	yes
fill level detection through container	no
liquids in direct contact	no
object detection / bulk goods	yes


**connectors and mating connectors**

ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m
additional cable connectors and field wireable connectors: see accessories	


**Accessories**

HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
BX 20-360-1	Velcro strip cut to length 360 mm
for details: see accessories section	

**dimension drawings**

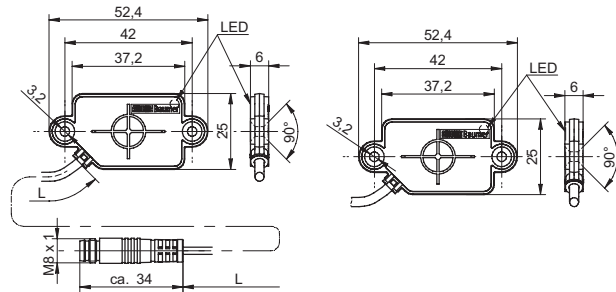

**connection diagram**

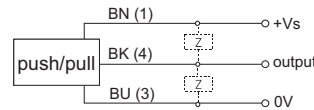


order reference	output function	connection types
CFDK 25G1125/KS35LN6	active high	flylead connector M8, L=200 mm
CFDK 25G1125/LN6	active high	cable PVC 3 x 0,14, 2 m
CFDK 25G3125/LN6	active low	cable PVC 3 x 0,14, 2 m



**Sn = 15 mm**

- Sensitivity adjustment via pot
- Rectangular housing
- Flush mounting possible

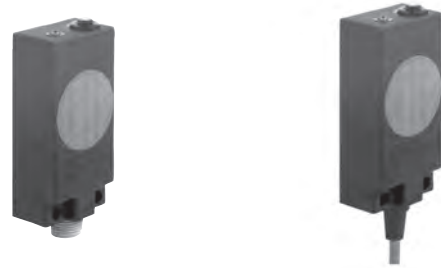

### general data

nominal sensing distance Sn	15 mm
nominal sensing distance Sn adjustable	4 ... 15 mm
mounting type	flush
GND electrode	yes
temperature drift	± 15 % (+10 ... +70 °C)
sensitivity adjustment	potentiometer, 15 turn
output indicator	LED yellow

### electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
output current	< 200 mA
voltage drop Vd	< 1,5 VDC
switching frequency	< 50 Hz
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

type	rectangular
housing material	PBT
dimension	30 mm

### ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 65

### field of application

detection of non-conductive media	yes
fill level detection through container	yes
liquids in direct contact	no
object detection / bulk goods	yes

### connectors and mating connectors

ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m


additional cable connectors and field wireable connectors: see accessories

### Accessories


10152386	Sensofix series 30
10161958	Converter PNP/NPN - M12 x 1
11163237	Adapter for pulse stretching M12

for details: see accessories section

### dimension drawings

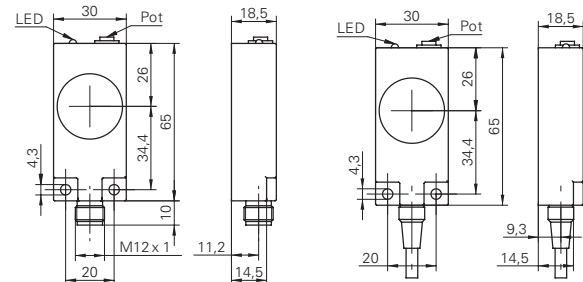


### connection diagrams

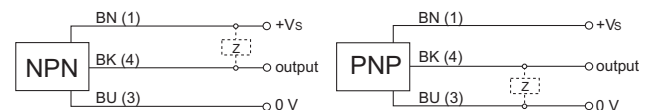

order reference	housing length	output circuit	connection types
CFDK 30N1600	65 mm	NPN make function (NO)	cable, 2 m
CFDK 30N1600/S14	75 mm	NPN make function (NO)	connector M12
CFDK 30N3600	65 mm	NPN break function (NC)	cable, 2 m
CFDK 30N3600/S14	75 mm	NPN break function (NC)	connector M12
CFDK 30P1600	65 mm	PNP make function (NO)	cable, 2 m
CFDK 30P1600/S14	75 mm	PNP make function (NO)	connector M12
CFDK 30P3600	65 mm	PNP break function (NC)	cable, 2 m
CFDK 30P3600/S14	75 mm	PNP break function (NC)	connector M12






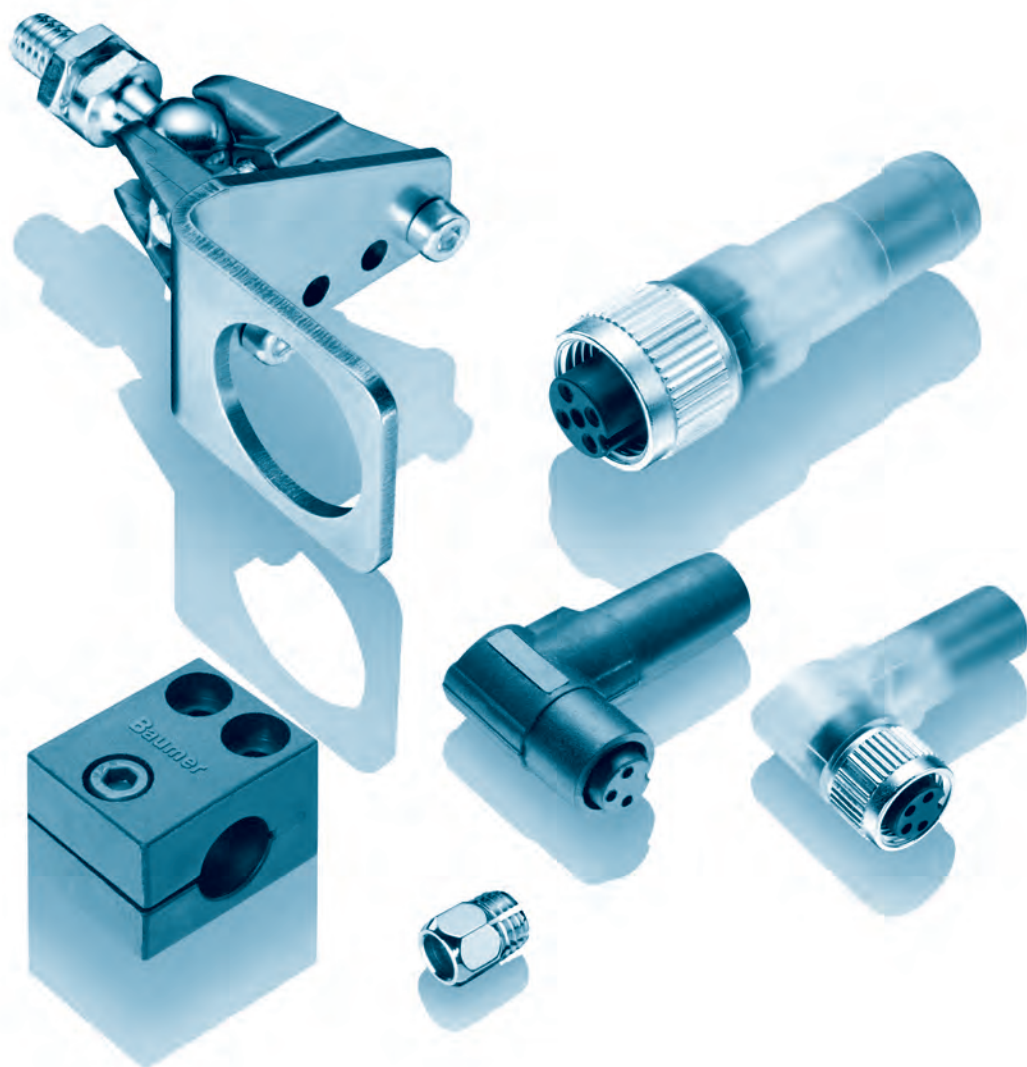

## Accessories

Connectors and mating connectors	Page 42
Connectors / Pin assignment	Page 46
Connectors / Housing types	Page 47
Mounting accessories	Page 48
Mounting accessories Sensofix	Page 50
Mounting accessories CFDK 25	Page 51


**ES 18** - Cable socket M12 straight, not pre-assembled

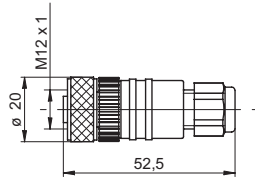

order reference	
ES 18A PG7	Connector M12, 4 pin, straight
ES 18C PG7	Connector M12, 5 pin, straight

- Connector female unshielded
- Connector only, no cable supplied
- 4 and 5 pin versions


**ES 14** - Cable socket M12 angular, not pre-assembled



order reference	
ES 14A PG7	Connector M12, 4 pin, angular
ES 14C PG7	Connector M12, 5 pin, angular

- Connector female unshielded
- Connector only, no cable supplied
- 4 and 5 pin versions


**ES 21** - Cable socket M8 straight, not pre-assembled



order reference	
ES 21	Connector M8, 3 pin, straight
ES 21A	Connector M8, 4 pin, straight

- Connector female unshielded
- Connector only, no cable supplied
- 3 and 4 pin version

**ES 22** - Cable socket M8 angular, not pre-assembled




- Connector female unshielded
- Connector only, no cable supplied
- 3 and 4 pin versions

**order reference**

ES 22	Connector M8, 3 pin, angular
ES 22A	Connector M8, 4 pin, angular

**ESG 32** - Connector M8 straight

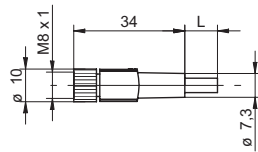


- Connector unshielded
- 3 and 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836
- Meet EN 60079-25 requirements for intrinsically safe ATEX applications

**order reference**

ESG 32AH0200	Connector M8, 4 pin, straight, 2 m
ESG 32AH0500	Connector M8, 4 pin, straight, 5 m
ESG 32AH1000	Connector M8, 4 pin, straight, 10 m
ESG 32SH0200	Connector M8, 3 pin, straight, 2 m
ESG 32SH0500	Connector M8, 3 pin, straight, 5 m
ESG 32SH0500/PL	Connector M8, 3 pin, straight, 5 m
ESG 32SH1000	Connector M8, 3 pin, straight, 10 m

**ESG 32G** - Connector M8 straight, shielded




- Connector shielded, screen connected with cap nut
- 3 and 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

**order reference**

ESG 32AH0200G	Connector M8, 4 pin, straight, 2 m, shielded
ESG 32AH0500G	Connector M8, 4 pin, straight, 5 m, shielded
ESG 32AH1000G	Connector M8, 4 pin, straight, 10 m, shielded
ESG 32SH0500G	Connector M8, 3 pin, straight, 5 m, shielded
ESG 32SH1000G/T	Connector M8, 3 pin, straight, 10 m, shielded


**ESW 31 - Connector M8 angular**



- Connector unshielded
- 3 and 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836
- Meet EN 60079-25 requirements for intrinsically safe ATEX applications

order reference	
ESW 31AH0200	Connector M8, 4 pin, angular, 2 m
ESW 31AH0500	Connector M8, 4 pin, angular, 5 m
ESW 31AH1000	Connector M8, 4 pin, angular, 10 m
ESW 31SH0200	Connector M8, 3 pin, angular, 2 m
ESW 31SH0500	Connector M8, 3 pin, angular, 5 m
ESW 31SH0500/PL	Connector M8, 3 pin, angular, 5 m
ESW 31SH1000	Connector M8, 3 pin, angular, 10 m


**ESW 31G - Connector M8 angular, shielded**



- Connector shielded, screen connected with cap nut
- 3 and 4 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference	
ESW 31AH0200G	Connector M8, 4 pin, angular, 2 m, shielded
ESW 31AH0500G	Connector M8, 4 pin, angular, 5 m, shielded
ESW 31AH1000G	Connector M8, 4 pin, angular, 10 m, shielded
ESW 31SH0200G	Connector M8, 3 pin, angular, 2 m, shielded
ESW 31SH0500G	Connector M8, 3 pin, angular, 5 m, shielded


**ESG 34 - Connector M12 straight**

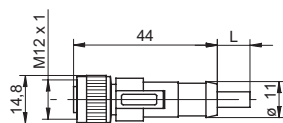

- Connector unshielded
- 3, 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference	
ESG 34AH0200	Connector M12, 4 pin, straight, 2 m
ESG 34AH0500	Connector M12, 4 pin, straight, 5 m
ESG 34AH1000	Connector M12, 4 pin, straight, 10 m
ESG 34CH0200	Connector M12, 5 pin, straight, 2 m
ESG 34CH0500	Connector M12, 5 pin, straight, 5 m
ESG 34SH0200	Connector M12, 3 pin, straight, 2 m
ESG 34SH0500	Connector M12, 3 pin, straight, 5 m
ESG 34SH1000	Connector M12, 3 pin, straight, 10 m


**ESG 34G** - Connector M12 straight, shielded

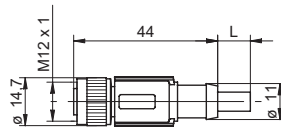

- Connector shielded, screen connected with cap nut
- 4, 5 and 8 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference	
ESG 34AH0200G	Connector M12, 4 pin, straight, 2 m, shielded
ESG 34AH0500G	Connector M12, 4 pin, straight, 5 m, shielded
ESG 34AH1000G	Connector M12, 4 pin, straight, 10 m, shielded
ESG 34CH0200G	Connector M12, 5 pin, straight, 2 m, shielded
ESG 34CH0500G	Connector M12, 5 pin, straight, 5 m, shielded
ESG 34CH1000G	Connector M12, 5 pin, straight, 10 m, shielded
ESG 34FH0200G	Connector M12, 8 pin, straight, 2 m, shielded
ESG 34FH0500G	Connector M12, 8 pin, straight, 5 m, shielded
ESG 34FH1000G	Connector M12, 8 pin, straight, 10 m, shielded


**ESW 33** - Connector M12 angular



- Connector unshielded
- 3, 4 and 5 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836

order reference	
ESW 33AH0200	Connector M12, 4 pin, angular, 2 m
ESW 33AH0500	Connector M12, 4 pin, angular, 5 m
ESW 33AH1000	Connector M12, 4 pin, angular, 10 m
ESW 33CH0200	Connector M12, 5 pin, angular, 2 m
ESW 33CH0500	Connector M12, 5 pin, angular, 5 m
ESW 33SH0200	Connector M12, 3 pin, angular, 2 m
ESW 33SH0500	Connector M12, 3 pin, angular, 5 m
ESW 33SH1000	Connector M12, 3 pin, angular, 10 m


**ESW 33G** - Connector M12 angular, shielded



- Connector shielded, screen connected with cap nut
- 4, 5 and 8 pin versions
- Cable coating PUR
- Halogen-free
- Suitable for flexible cable carriers
- UL listed, number E315836


order reference	
ESW 33AH0200G	Connector M12, 4 pin, angular, 2 m, shielded
ESW 33AH0500G	Connector M12, 4 pin, angular, 5 m, shielded
ESW 33AH1000G	Connector M12, 4 pin, angular, 10 m, shielded
ESW 33CH0500G	Connector M12, 5 pin, angular, 5 m, shielded
ESW 33FH0200G	Connector M12, 8 pin, angular, 2 m, shielded
ESW 33FH0500G	Connector M12, 8 pin, angular, 5 m, shielded
ESW 33FH1000G	Connector M12, 8 pin, angular, 10 m, shielded

**M8 3 pin**



- 1 = BN
- 3 = BU
- 4 = BK

**M8 4 pin**




- 1 = BN
- 2 = WH
- 3 = BU
- 4 = BK

ES 21  
ES 22  
ESG 32S  
ESW 31S


ES 21A  
ES 22A  
ESG 32A  
ESW 31A

**M12 3 pin**




- 1 = BN
- 2 = n.c.
- 3 = BU
- 4 = BK

**M12 4 pin**




- 1 = BN
- 2 = WH
- 3 = BU
- 4 = BK

**M12 5 pin**



- 1 = BN
- 2 = WH
- 3 = BU
- 4 = BK
- 5 = GY

**8 pin**



- 1 = WH
- 2 = BN
- 3 = GN
- 4 = YE
- 5 = GY
- 6 = PK
- 7 = BU
- 8 = RD

ESG 34S  
ESW 33S



ES 14  
ES 18  
ES 21C  
ES 22C  
ESG 34A  
ESW 33A

ES 14C  
ES 18C  
ESG 34C  
ESW 33C

ESG 34G  
ESW 33G



Connectors M8

Dimension	20	Dimension	20
-----------	----	-----------	----

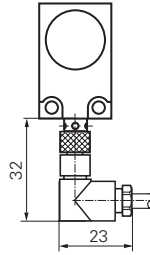

Connectors M12

Dimension	30	Dimension	30
-----------	----	-----------	----










**Sensofix-Mounting kit for sensors series 12 round**

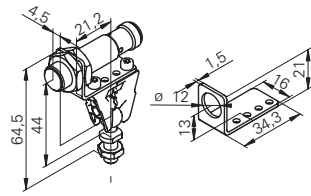


- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with all sensors in M12 housing

**order reference**

10151720 Sensofix series 12 round

**Sensofix-Mounting kit for sensors series 18 round**

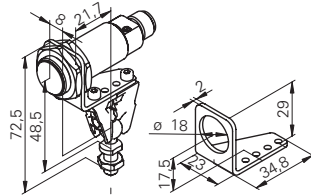


- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with all sensors in M18 housing

**order reference**

10151658 Sensofix series 18

**Sensofix-Mounting kit for sensors series 18/20**

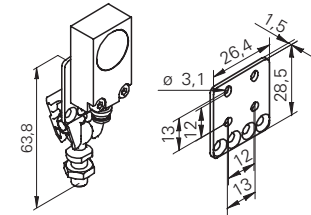


- Clamps made of stainless steel
- Ball pivots made of galvanized steel
- Mounting panel made of stainless steel

For use with inductive sensors series 18/20 in rectangular designs

**order reference**

10152385 Sensofix series 18/20 inductive rectangular

**Mounting bracket 20 mm**




- Material: Polypropylene (PP)

For sensors with Ø 20 mm

**order reference**

10143377 Mounting bracket for sensors Ø 20 mm

**Mounting kit for CFDK 25**

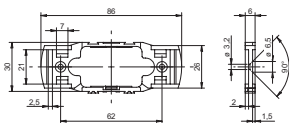


**order reference**

HC25-1	Mounting frame HC25-1 incl. accessories, optional Velcro strip order separately
--------	---

- 1 pcs. mounting frame HC25; Material PA 12
- 2 pcs. cable ties 186x4,7 mm
- 2 pcs. adhesive pads
- 2 pcs. spacer

For use with CFDK 25

**Velcro strip cut to length for mounting frame HC25**

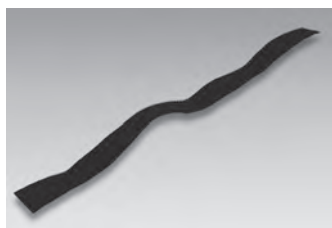

**order reference**


BX 20-1200-1	Velcro strip cut to length 1200 mm
BX 20-2000-1	Velcro strip cut to length 2000 mm
BX 20-360-1	Velcro strip cut to length 360 mm
BX 20-4000-1	Velcro strip cut to length 4000 mm

- Base material: Polyamide
- Overall thickness: 1,8 to 2,2 mm
- Breaking strength: > 210 N/cm


For use with mounting frame HC25

**Snap-in without tools**


**1. Fasten frame**

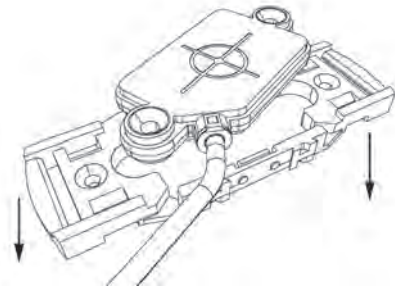

**2. Snap in sensor**

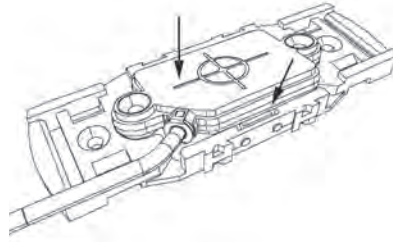


**3. Done**

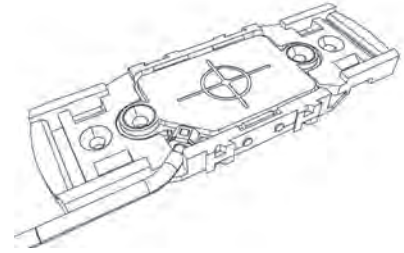


**Installation options**


**Flush with countersunk screws**

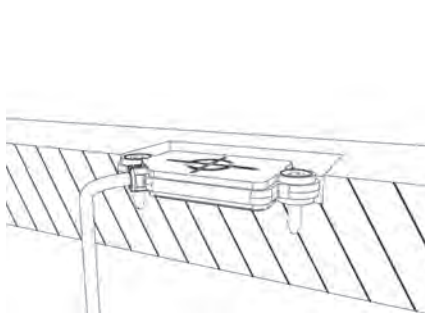


**With cable ties**

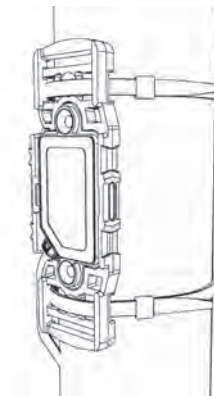


**With Velcro**

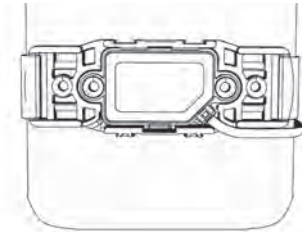


**Cascaded installation**

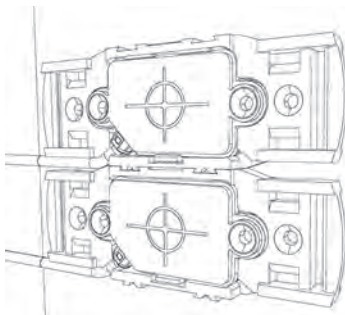

**Fixing with glue or adhesive pads**



**With countersunk screws**

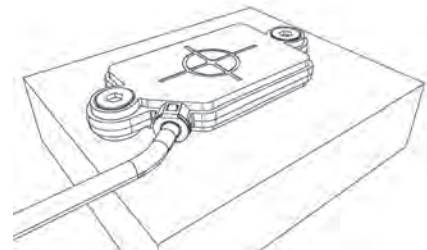

order reference	page
<b>1</b>	
10143377	50
10151658	50
10151720	50
10152385	50
10161958	48
10161959	48
11084376	48
11084377	48
11087165	48
11163236	48
11163237	49
<b>B</b>	
BX 20-1200-1	51
BX 20-2000-1	51
BX 20-360-1	51
BX 20-4000-1	51
<b>C</b>	
CFAH 30P1200/S14	32
CFAH 30P3200/S14	32
CFAK 12N1103	22
CFAK 12N1140/KS35L	21
CFAK 12N1140/L	21
CFAK 12N3103	22
CFAK 12N3140/KS35L	21
CFAK 12N3140/L	21
CFAK 12P1103	22
CFAK 12P1140/KS35L	21
CFAK 12P1140/L	21
CFAK 12P3103	22
CFAK 12P3140/KS35L	21
CFAK 12P3140/L	21
CFAK 18N1100	24
CFAK 18N1200	25
CFAK 18N3100	24
CFAK 18N3200	25
CFAK 18P1100	24
CFAK 18P1200	25
CFAK 18P3100	24
CFAK 18P3200	25
CFAK 22U9500/AMP	28
CFAK 30N1100	29
CFAK 30N1200	30
CFAK 30N3100	29
CFAK 30N3200	30
CFAK 30P1100	29
CFAK 30P1200	30
CFAK 30P3100	29
CFAK 30P3200	30
CFAM 12N1600	23
CFAM 12N1600/S14	23
CFAM 12N3600	23
CFAM 12N3600/S14	23
CFAM 12P1600	23
CFAM 12P1600/S14	23

order reference	page
CFAM 12P3600	23
CFAM 12P3600/S14	23
CFAM 18N1600	26
CFAM 18N1600/S14	26
CFAM 18N3600	26
CFAM 18N3600/S14	26
CFAM 18P1600	26
CFAM 18P1600/S14	26
CFAM 18P3600	26
CFAM 18P3600/S14	26
CFAM 30N1600	31
CFAM 30N1600/S14	31
CFAM 30N3600	31
CFAM 30N3600/S14	31
CFAM 30P1600	31
CFAM 30P1600/S14	31
CFAM 30P3600	31
CFAM 30P3600/S14	31
CFBM 20N1600	27
CFBM 20N3600	27
CFBM 20P1600	27
CFBM 20P3600	27
CFDK 25G1125/KS35LN1	34
CFDK 25G1125/KS35LN3	35
CFDK 25G1125/KS35LN4	36
CFDK 25G1125/KS35LN5	37
CFDK 25G1125/KS35LN6	38
CFDK 25G1125/LN1	34
CFDK 25G1125/LN3	35
CFDK 25G1125/LN4	36
CFDK 25G1125/LN5	37
CFDK 25G1125/LN6	38
CFDK 25G3125/LN1	34
CFDK 25G3125/LN3	35
CFDK 25G3125/LN4	36
CFDK 25G3125/LN5	37
CFDK 25G3125/LN6	38
CFDK 30N1600	39
CFDK 30N1600/S14	39
CFDK 30N3600	39
CFDK 30N3600/S14	39
CFDK 30P1600	39
CFDK 30P1600/S14	39
CFDK 30P3600	39
CFDK 30P3600/S14	39
CFDM 20N1500/S35L	33
CFDM 20N3500/S35L	33
CFDM 20P1500/S35L	33
CFDM 20P3500/S35L	33
<b>E</b>	
ES 14A PG7	42
ES 14C PG7	42
ES 18A PG7	42
ES 18C PG7	42
ES 21	42
ES 21A	42
ES 22	43
ES 22A	43

order reference	page
ESG 32AH0200	43, 46
ESG 32AH0200G	43
ESG 32AH0500	43, 46
ESG 32AH0500G	43
ESG 32AH1000	43, 46
ESG 32AH1000G	43
ESG 32SH0200	43, 46
ESG 32SH0500	43, 46
ESG 32SH0500/PL	43
ESG 32SH0500G	43
ESG 32SH1000	43, 46
ESG 32SH1000G/T	43
ESG 34AH0200	44
ESG 34AH0200G	45
ESG 34AH0500	44
ESG 34AH0500G	45
ESG 34AH1000	44
ESG 34AH1000G	45
ESG 34CH0200	44
ESG 34CH0200G	45
ESG 34CH0500	44
ESG 34CH0500G	45
ESG 34CH1000G	45
ESG 34FH0200G	45
ESG 34FH0500G	45
ESG 34FH1000G	45
ESG 34SH0200	44
ESG 34SH0500	44
ESG 34SH1000	44
ESW 31AH0200	44
ESW 31AH0200G	44
ESW 31AH0500	44
ESW 31AH0500G	44
ESW 31AH1000	44
ESW 31AH1000G	44
ESW 31SH0200	44
ESW 31SH0200G	44
ESW 31SH0500	44
ESW 31SH0500/PL	44
ESW 31SH0500G	44
ESW 31SH1000	44
ESW 33AH0200	45
ESW 33AH0200G	45
ESW 33AH0500	45
ESW 33AH0500G	45
ESW 33AH1000	45
ESW 33AH1000G	45
ESW 33CH0200	45
ESW 33CH0500	45
ESW 33CH0500G	45
ESW 33FH0200G	45
ESW 33FH0500G	45
ESW 33FH1000G	45
ESW 33SH0200	45
ESW 33SH0500	45
ESW 33SH1000	45
<b>H</b>	
HC25-1	51



Best prices



The fastest  
supply



Best level  
technical  
support



Customers  
in over 100  
countries

Eltra Trade s.r.o. supplies full range of Baumer products with the best prices and delivery terms.

## We supply:

- *Baumer Capacitive Sensors*
- *Baumer Inductive Sensors*
- *Baumer Magnetic Sensors*
- *Baumer Photoelectric Sensors*
- *Baumer Ultrasonic Sensors*
- *other Baumer products*

To find out stock ability and delivery time to your region, please contact our manager.

✉ [info@eltra-trade.com](mailto:info@eltra-trade.com)

